



## Benefits

Zeta 40 is a powerful wall washing linear LED luminaire which can provide an even wash of light up to ten metres, with an efficacy of over 72 lumens per watt. Dynamic White systems are available for creating smooth variations in colour temperature to suit the space and its usage.

## Applications

- Wall Washing
- Facades
- Archways & Tunnels

## Features

- High Lumen Output System
- Efficacy of 140 lumens per watt
- Dynamic White options
- Various colour options
- Energy efficient
- 3 step MacAdam
- Dimmable
- IP66 or IP40
- Excellent thermal management
- Low thermal resistance

## Technical Information

Product Specification	KL-ZE-40
LED Type	Seoul SZ5-M2
LED Pitch (mm)	40mm
Drive Current (mA)	700mA
Lumens (lm/m)	3727
Power (W/m)	25.2W
Efficacy (lm/W)	72 (4000K)
Binning	3 step MacAdam
Lifetime LM80 (25°C)	> 50,000hrs
CCT	2700K - 3000K - 4000K - 5700K - Dynamic White - Red - Blue - Green - Amber
Colours	Red - Blue - Green - Amber
Beam Angle	15° - 25° - 45° - 18° x 48° - 60° - 90° - 120°
CRI	>80
Dimming Options	0-10V - DALI - DMX
IP Rating	IP40 - IP66
Ambient Operating Temp	-20°C to 50°C
Fixing Bracket Type	40mm - 60mm - 160mm - 310mm (Adjustable)
Diffuser (Optional)	Clear
Available Lengths	335mm > 2004mm (84mm increments)
Weight	1.56Kg/m

**Product Selector**

**ZE-40-27-60-66-310-C-N-AA**

**Colour**

- 2700K      27
- 3000K      30
- 4000K      40
- 5700K      57
- Dynamic White      DW
- Red      R
- Green      G
- Blue      B
- Amber      A

**Beam Angle**

- 15°      15
- 25°      25
- 45°      45
- 18° x 48°      18x48
- 60°      60
- 90°      90
- 120°      120

**IP Rating**

- IP66      66
- IP40      40

**Brackets**

- 40mm Vertical      40V
- 40mm Horizontal      40H
- 60mm      60
- 160mm      160
- 310mm      310

**Diffuser**


- Clear      C

**Accessories**

- Cowl (Anti-Glare)      C
- None      N

**Finish**

- Anodised Aluminium      AA
- Black      B
- White      W
- Grey      G

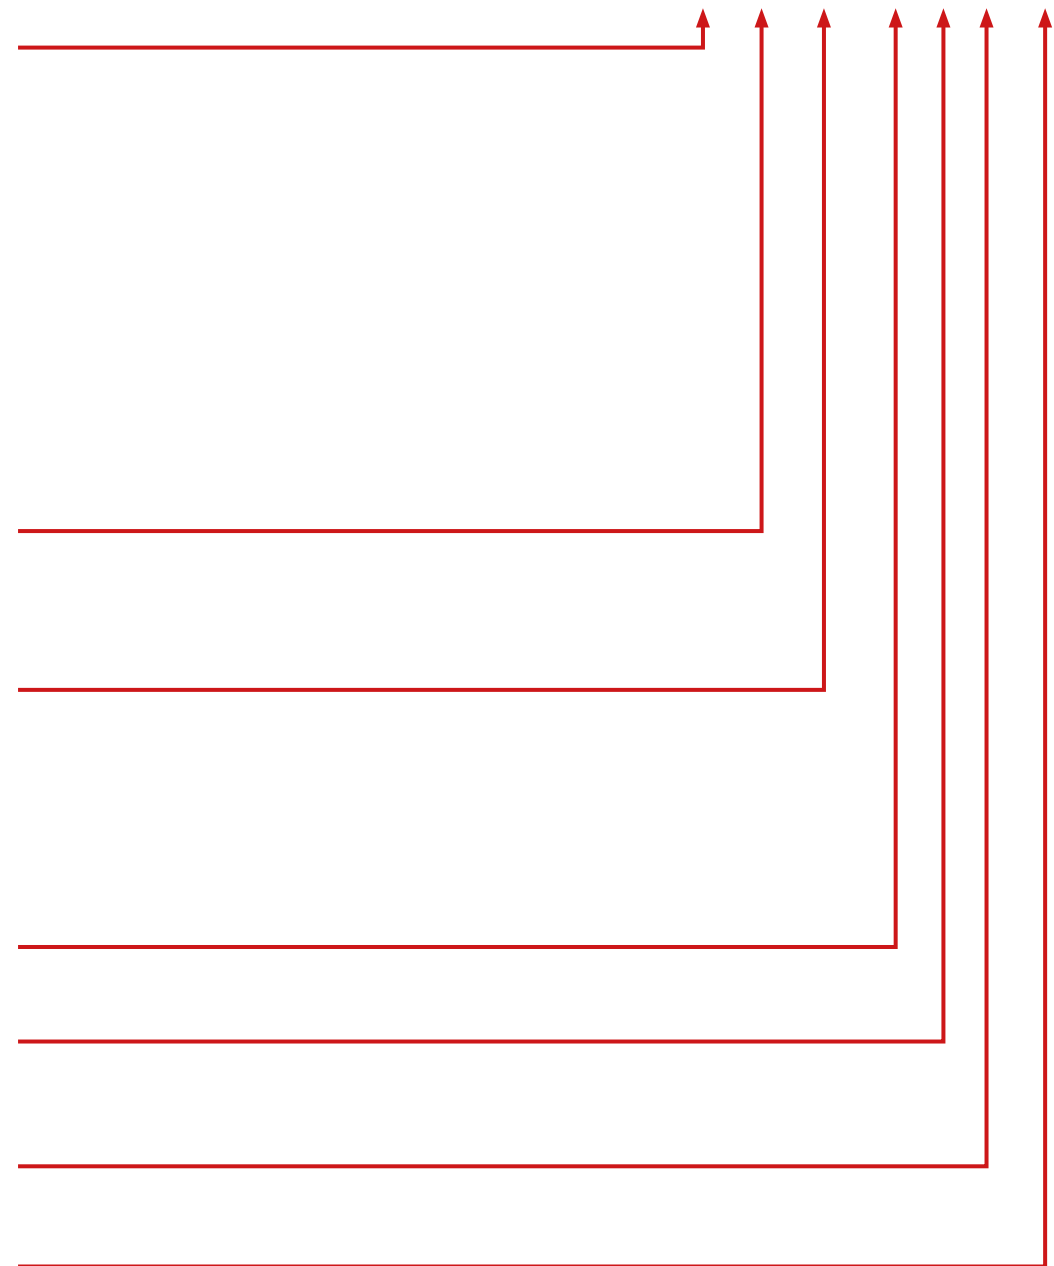

Complies with EN60598-1 and pertinent regulations



Please contact our sales team on **+44(0)113 263 9039** for further assistance

*Specifications are subject to change without prior notice. Please refer to our website for most up to date version*


**ZETA-40**

Rev 10 - 10/21




## Specification Drawings


### Horizontal Wall Mounted Brackets

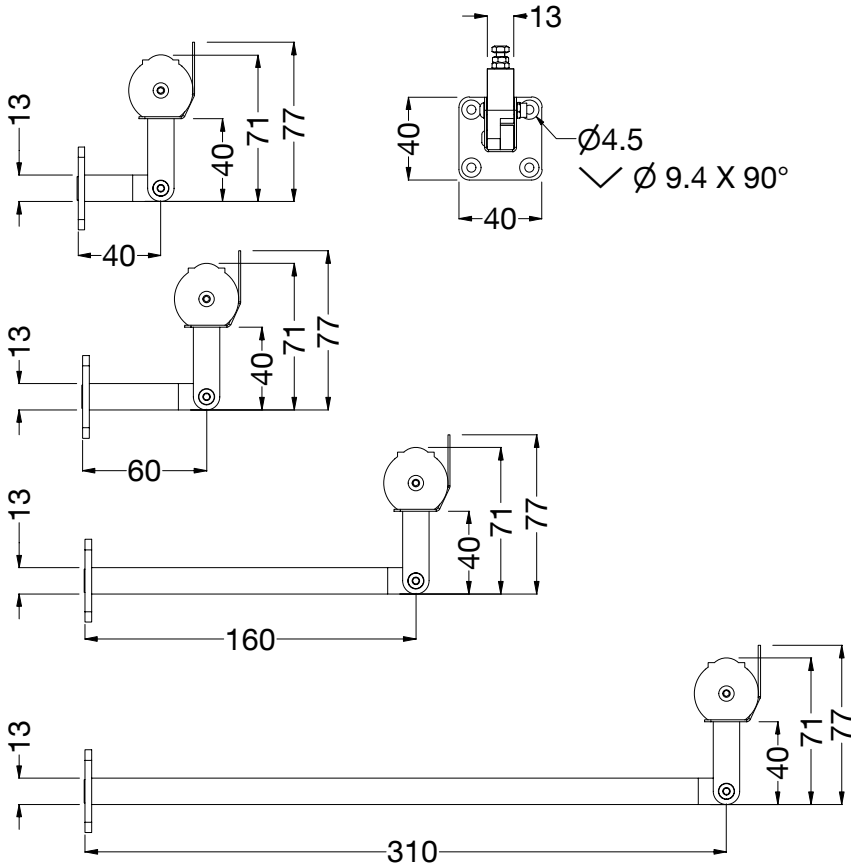


### Vertical Bracket (40mm)

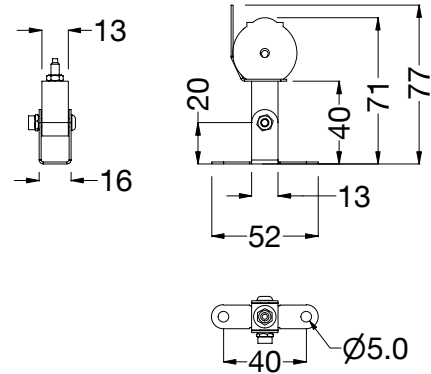


### Fitting Lengths

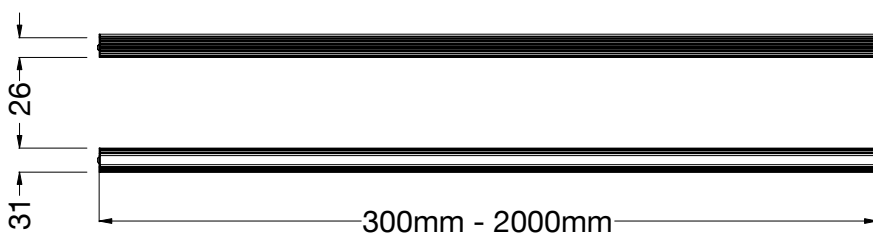

### Fitting End



### Extension Lead

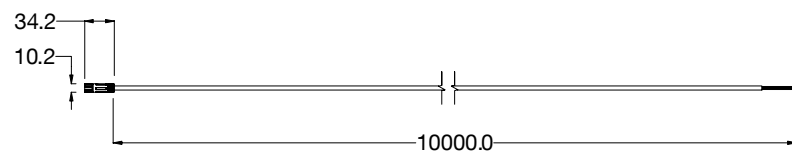



Extension cables with Female socket connector for IP66 must be purchased separately.

Order Code	Description	Compatible Products
CA051	M8 female 2 core assembly, PUR, 10000mm	IP66 Version Only





## TYPICAL INSTALLATIONS



### Switched

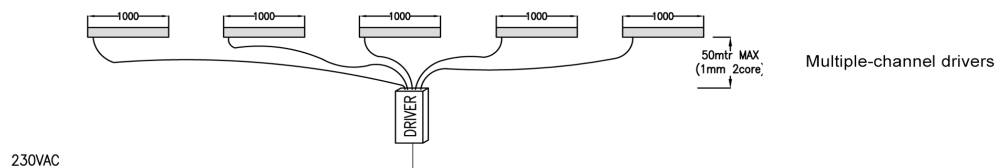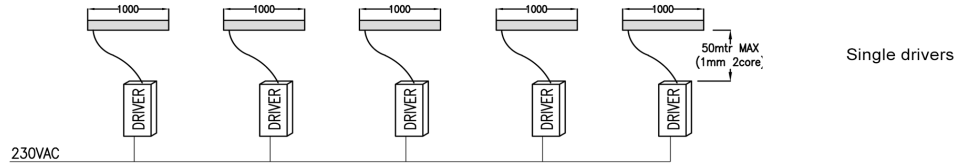

### 0-10V

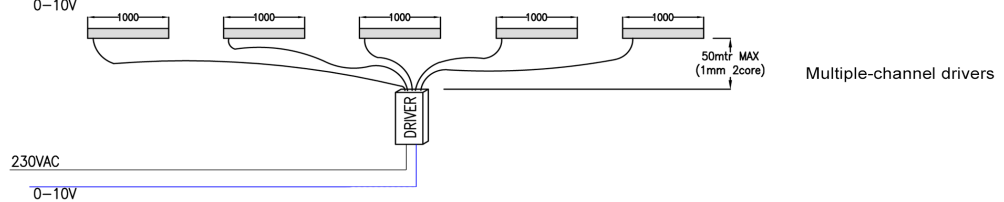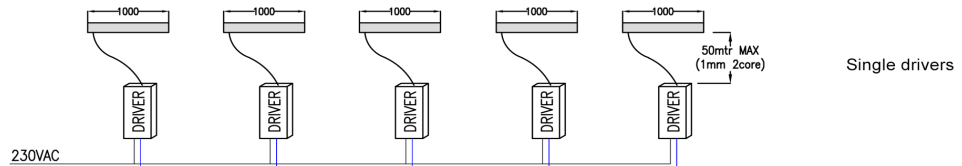

### DALI

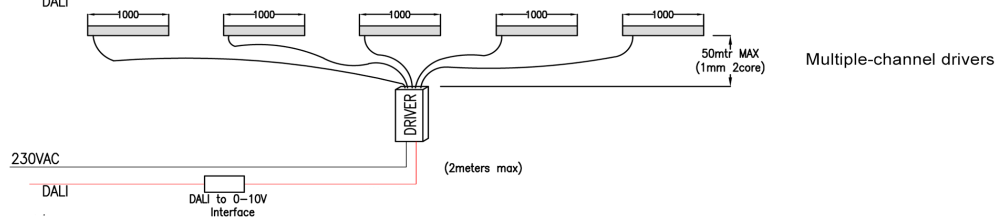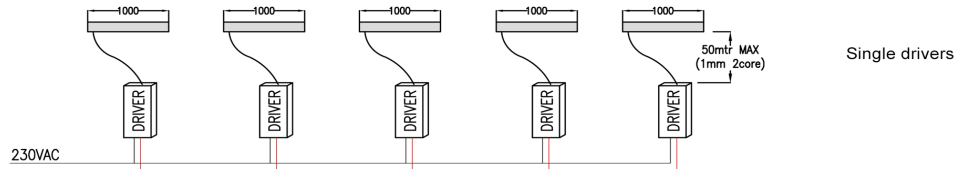

### DMX

