



Benefits

Zeta 40 is a powerful wall washing linear LED luminaire which can provide an even wash of light up to ten metres, with an efficacy of over 72 lumens per watt. Dynamic White systems are available for creating smooth variations in colour temperature to suit the space and its usage.

Applications

- Wall Washing
- Facades
- Archways & Tunnels

Features

- High Lumen Output System
- Efficacy of 72 lumens per watt
- Dynamic White options
- Various colour options
- Energy efficient
- 3 step MacAdam
- Dimmable
- IP66 or IP40
- Excellent thermal management
- Low thermal resistance

Technical Information

Product Specification	KL-ZE-40
LED Type	Seoul SZ5-M2
LED Pitch (mm)	40mm
Drive Current (mA)	700mA
Lumens (lm/m)	3727
Power (W/m)	52W
Efficacy (lm/W)	72 (4000K)
Binning	3 step MacAdam
Lifetime LM80 (25°C)	> 50,000hrs
CCT	2700K - 3000K - 4000K - 5700K - Dynamic White - Red - Blue - Green - Amber
Colours	Red - Blue - Green - Amber
Beam Angle	15° - 25° - 45° - 18° x 48° - 60° - 90° - 120°
CRI	>80
Dimming Options	0-10V - DALI - DMX
IP Rating	IP40 - IP66
Ambient Operating Temp	-20°C to 50°C
Fixing Bracket Type	40mm - 60mm - 160mm - 310mm (Adjustable)
Diffuser (Optional)	Clear
Available Lengths	335mm > 2004mm (84mm increments)
Weight	1.56Kg/m

Product Selector

ZE-40-27-60-66-310-C-N-AA

Colour

- 2700K 27
- 3000K 30
- 4000K 40
- 5700K 57
- Dynamic White DW
- Red R
- Green G
- Blue B
- Amber A

Beam Angle

- 15° 15
- 25° 25
- 45° 45
- 18° x 48° 18x48
- 60° 60
- 90° 90
- 120° 120

IP Rating

- IP66 66
- IP40 40

Brackets

- 40mm Vertical 40V
- 40mm Horizontal 40H
- 60mm 60
- 160mm 160
- 310mm 310

Diffuser


- Clear C

Accessories

- Cowl (Anti-Glare) C
- None N

Finish

- Anodised Aluminium AA
- Black B
- White W
- Grey G

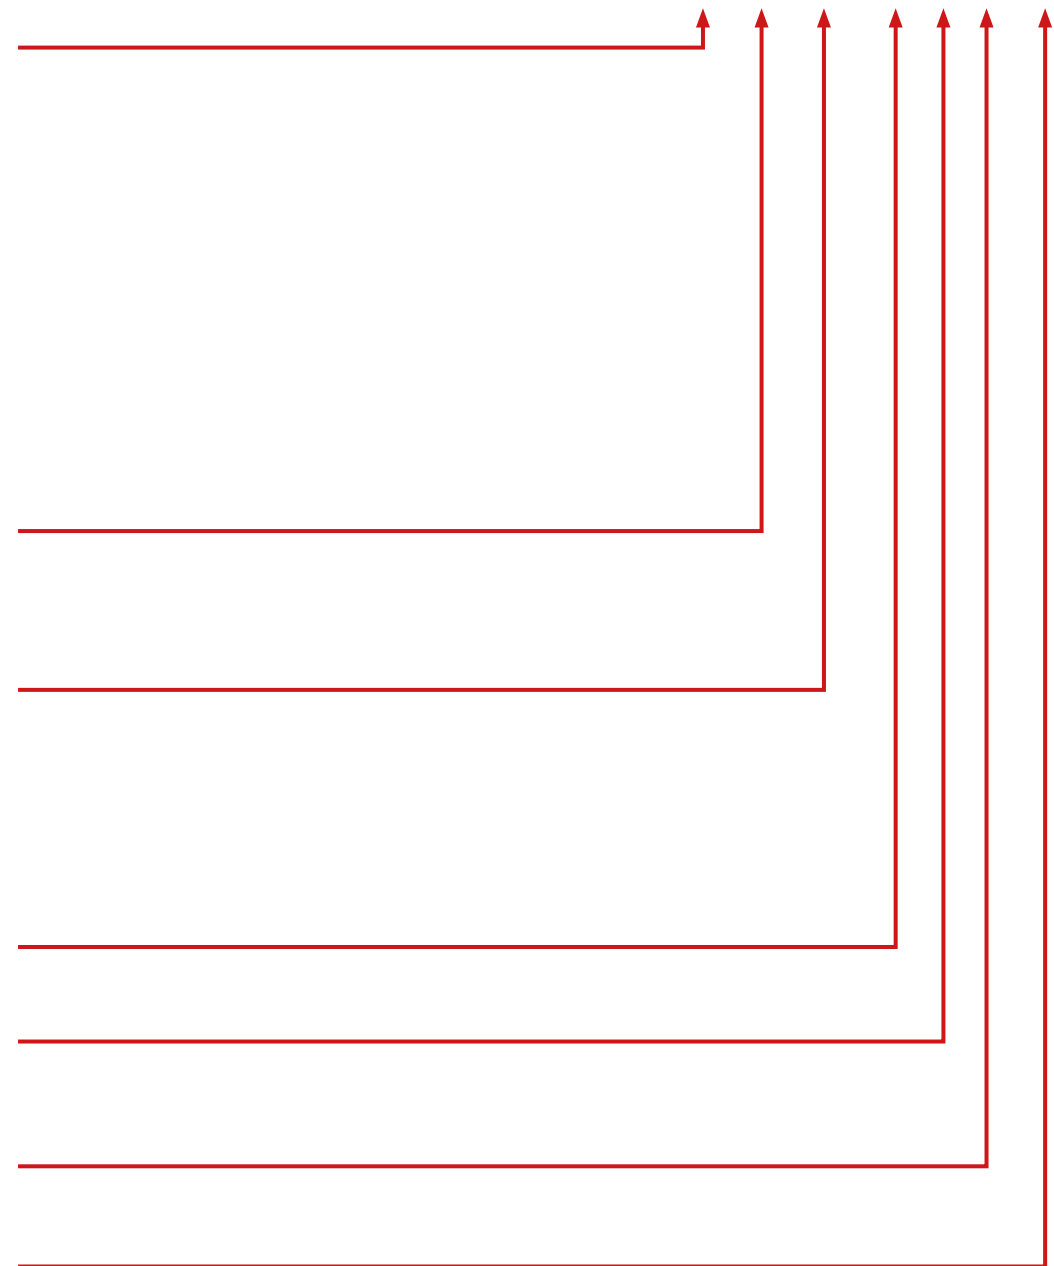

Complies with EN60598-1 and pertinent regulations



Please contact our sales team on **+44(0)113 263 9039** for further assistance

Specifications are subject to change without prior notice. Please refer to our website for most up to date version


ZETA-40

Rev 9 - 04/20




Specification Drawings


Horizontal Wall Mounted Brackets

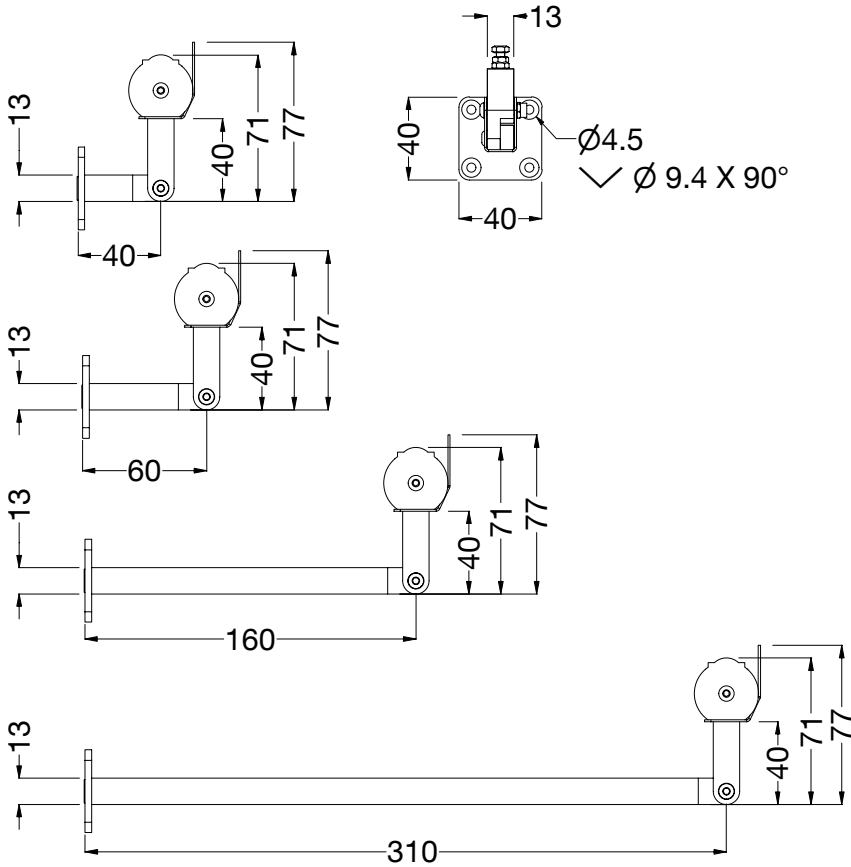


Vertical Bracket (40mm)

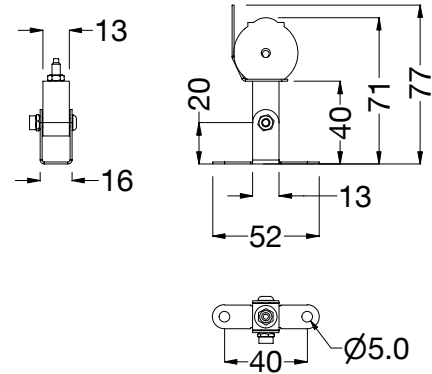


Fitting Lengths

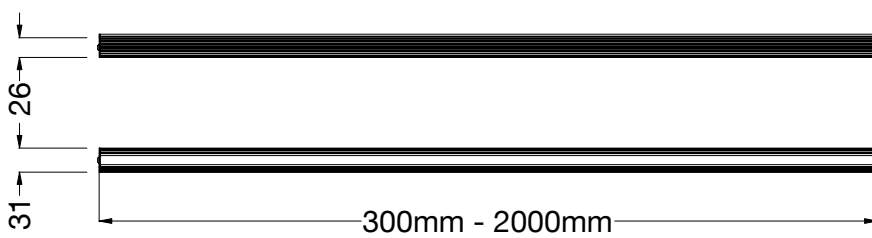

Fitting End



Extension Lead

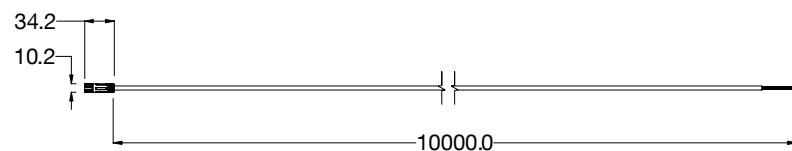



Extension cables with Female socket connector for IP66 must be purchased separately.

Order Code	Description	Compatible Products
CA051	M8 female 2 core assembly, PUR, 10000mm	IP66 Version Only





TYPICAL INSTALLATIONS



Switched

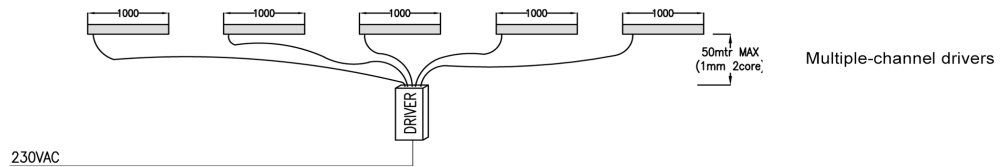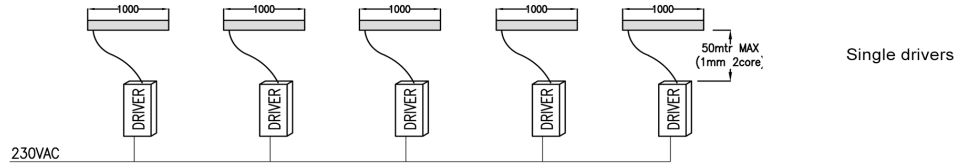

0-10V

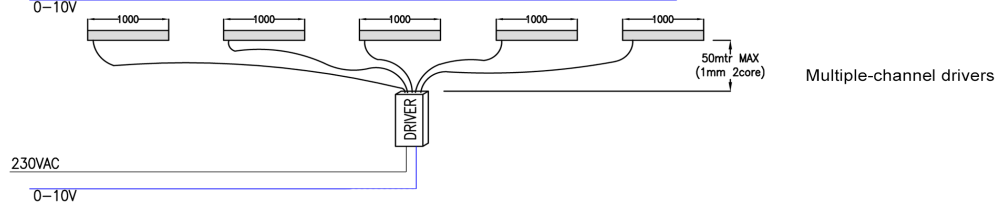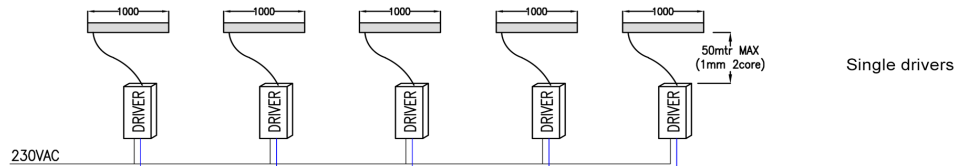

DALI

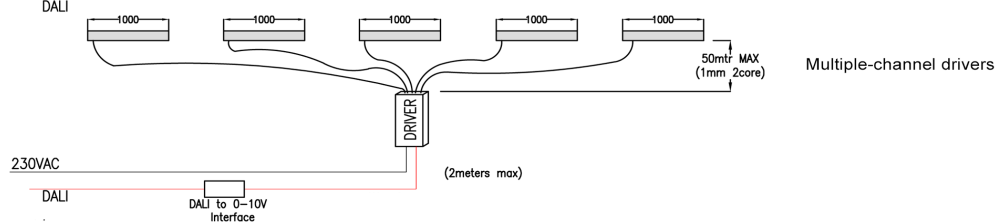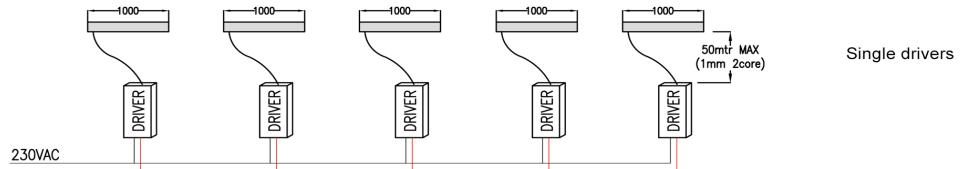

DMX

