



Applications


- Retail
- Museums
- Display
- Signage
- Hospitality
- Book Cases

Features

- Available in 2400K, 2700K, 3000K, 4000K, 5000K & 5700K
- 114 - 132 lumens per Watt
- CRI >80 - >90
- Dimmable via DALI - 0-10V
- IP54 - IP67
- Straight or 90° angle arm
- Various power options
- -25°C to 50°C operating temperature
- 5 year Warranty

Benefits

- Extensive range of Whites to suit a wide variety of applications
- ECO friendly and energy saving
- Excellent colour rendering
- Excellent lumen maintenance over lifetime
- ROHS Compliant

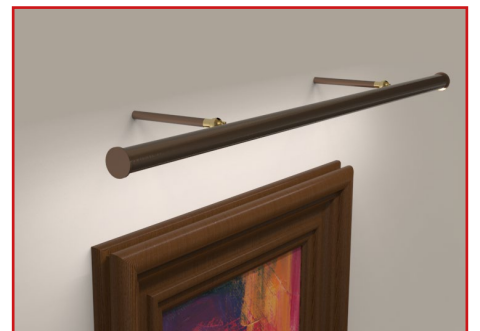


REGIS 1

Technical Information


Product Specification	Specification		
Power (W/m)	7	11	17
Lumen output (lm/m) based on 4000k	800	1460	2282
Efficacy (lm/W) based on 4000K	114	132	132
Input Voltage (V)	24V		
Colours	2400K - 2700K - 3000K - 4000K - 5000K - 5700K		
CRI	>80 - >90		
LED Chip	Osram Duris S2		
Binning	3 Sep MacAdam		
Control	Switched - 0-10V - DALI - Casambi (Bluetooth)		
Lifetime @ LM80	50,000 hrs @ 25°C		
Operating Temperature	-25°C to 50°C		
IP Rating	IP54 - IP65		
Cover/Lens	Clear Acrylic - Opal Acrylic		
Finish	White - Black - Bronze (Custom colours available on request)		
Mounting	Straight or 90° Arm - Adjustable (Different angles available on request)		

Specification Drawings

Straight Arm

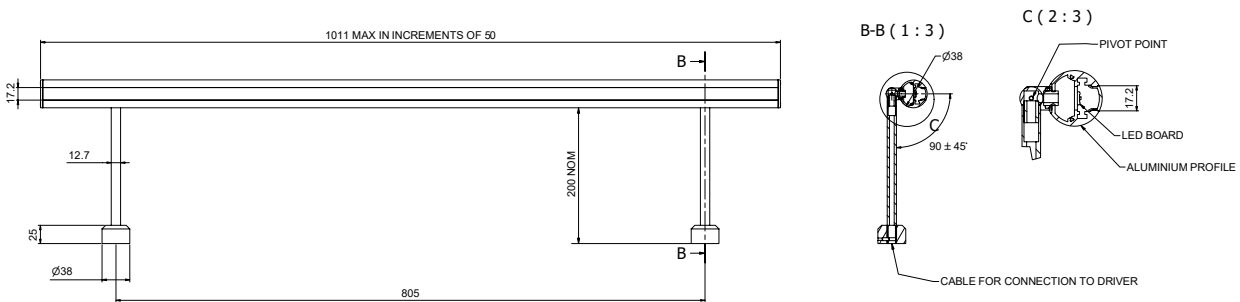


90° Arm

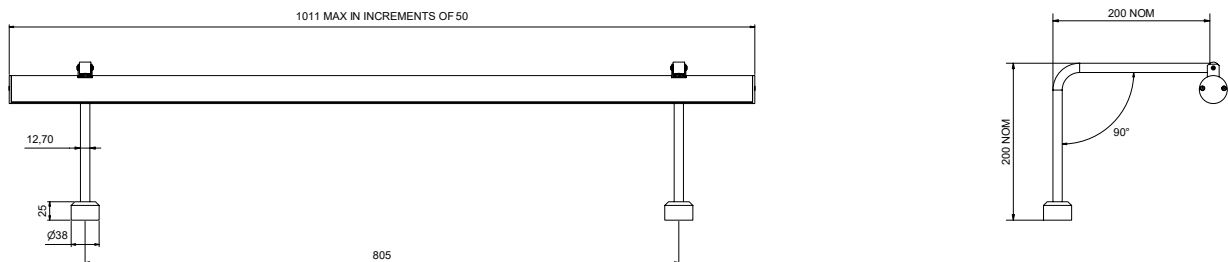

Product Selector

KL-REG1-M-50-90-D-O-54-WH-S-1011

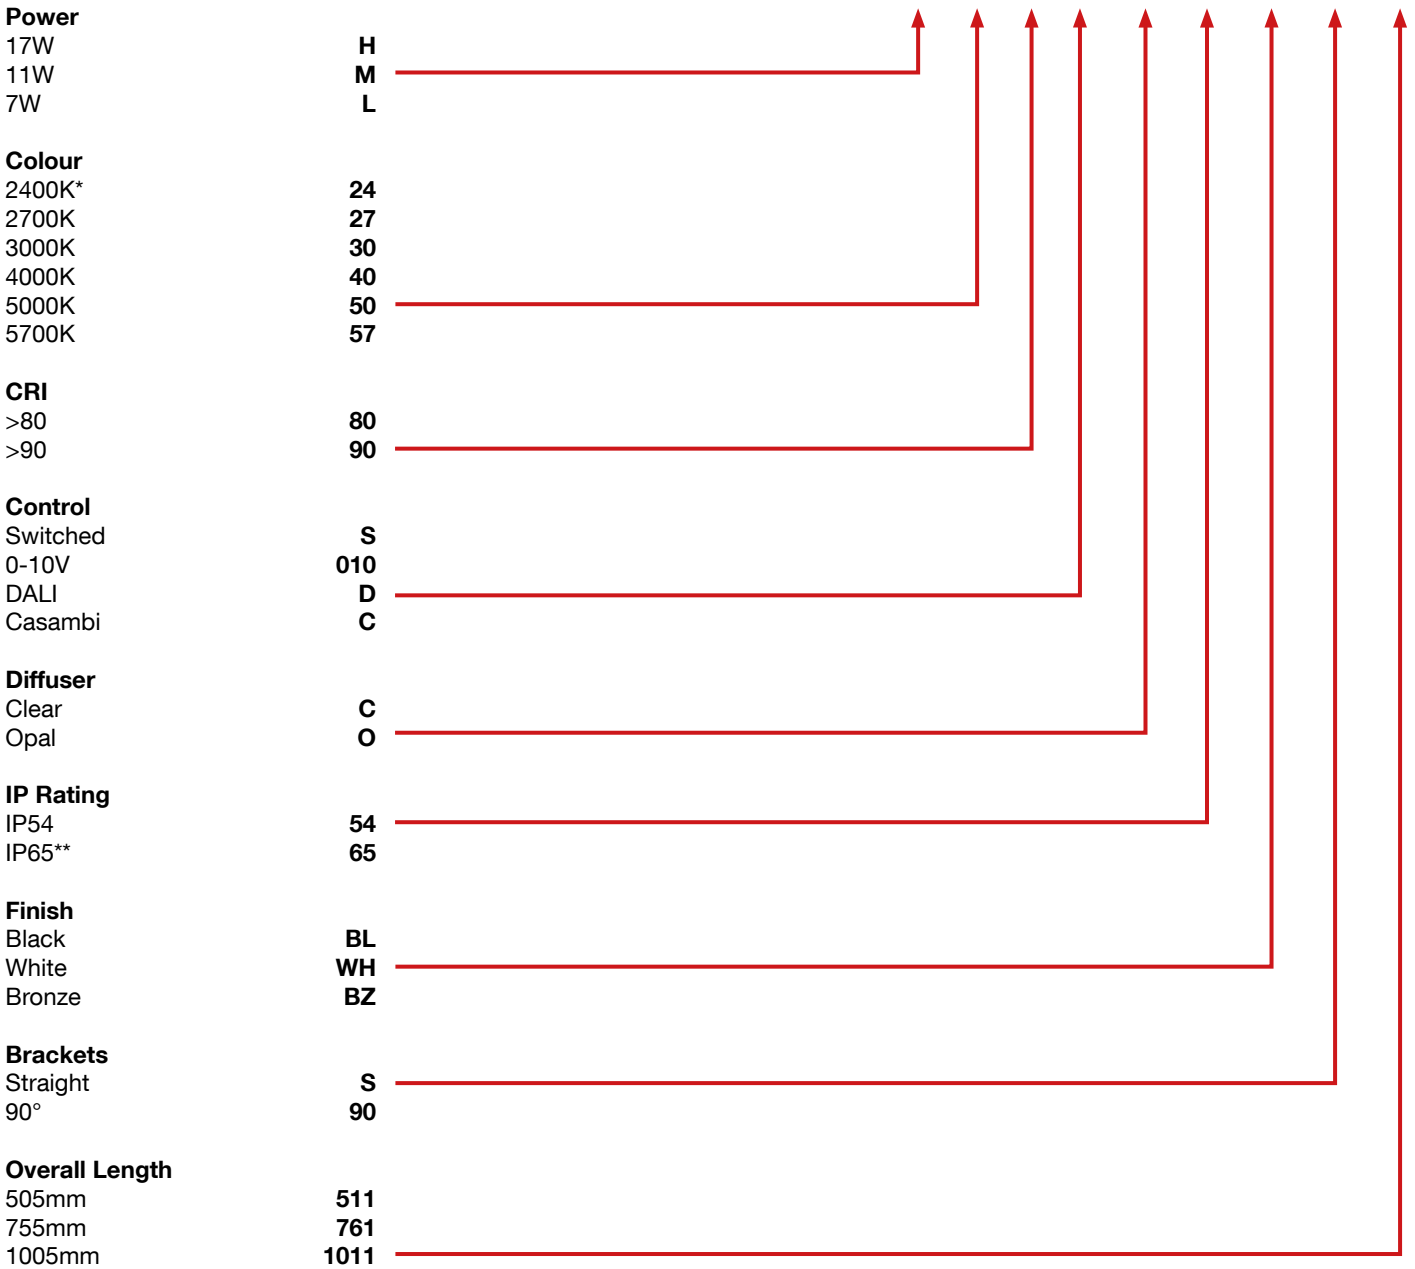

* 2400K not available in IP65

** Tolerances in CCT with IP65 products can occur due to manufacturing process



Please contact our sales team on **+44(0)113 263 9039** for further assistance

Specifications are subject to change without prior notice. Please refer to our website for most up to date version

