


Mersus 2

Single Colour Inground Linear LED



Applications

- Landscape
- Walkways

Features

- Curved or Straight applications
- Endless shapes possible
- Various colour options
- 2400K - 4500K plus Red, Green, Blue & Amber
- Dimmable
- IP67
- Silicone diffuser
- Aluminium housing
- Easy to install & maintain
- 3 years warranty

Product Specification

CCT	2400K • 2700K • 3200K • 4500K • Red • Green • Blue • Amber			
Lumen Output (lm/m)	2400K	2700K	3200K	4500K
	655	700	740	785
CRI	>80			
Input Voltage (V)	24			
Power (W/m)	White / Green / Blue = 24 Red / Amber = 16			
Control	DALI • DMX • 0-10V • Phase • Bluetooth			
Shape	Straight and Curved			
Cut Increments	White / Green / Blue = 83.3mm Red / Amber = 125mm			
Operating Temperature	-20°C to 55°C			
IP Rating	IP67			
IK Rating	IK10			
Minimum Bend Radius (Curved)	750mm			

Product Code

MER2-**1**-**2**-**3**

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes

MER2-832-S-1E

MER2-R-SC-1S

1 Colour >80CRI

2400K	824	Red	R
2700K	827	Green	G
3200K	832	Blue	B
4500K	845	Amber	A

2 Shape

Straight	S
Curved	C
Straight & Curved	SC


3 Cable Entry

1 End Feed	1E
1 Side Feed	1S

Mersus 2 is manufactured to bespoke shapes and lengths.

Please contact our sales team to discuss your requirements.

Specification Drawings

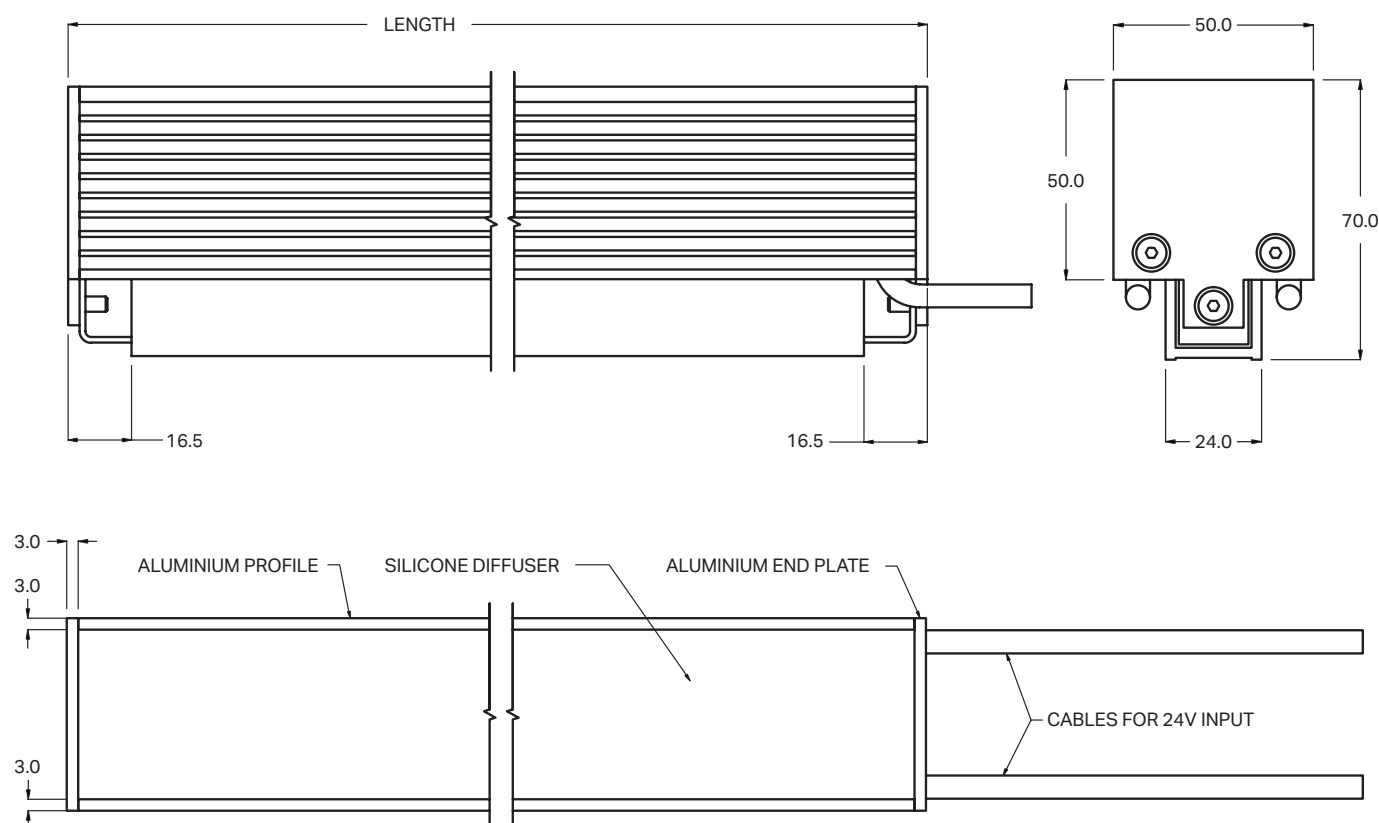

MER2-0122

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com