



Regis 2



Applications

- Furniture
- Display

Features

- Twin or single LED luminaire
- Privacy screen option
- 3000K - 4000K
- 17W - 11W - 7W
- 80 & 90 CRI
- Clear or Opal diffusers
- IP54
- Switched - 0-10V - DALI - Phase - DMX - Bluetooth

Benefits

- Various sizes available
- Dimmable
- Various lumen outputs
- Internal applications
- Remote drivers
- Maintainable
- Re-use luminaire
- 5yr Warranty

Technical Information

	Low	Medium	High
Power (W/m)	7	11	17
Lumen Output (lm/m) Based on 4000K			
Clear Diffuser	800	1460	2282
Efficacy (lm/W)	114	133	134
Opal Diffuser	480	876	1369
Efficacy (lm/W)	69	80	81
Input	24V		
CCT	3000K • 4000K		
CRI	>80 • >90		
LED Chip	Luxeon		
Binning	3 Step MacAdam Ellipse		
Control	Switched • 0-10V • DALI • Phase • DMX • Bluetooth		
Beam angle	120° • 30° • 12°		
Lifetime (LM80)	50,000hrs @25°C		
Operating Temp	-25°C to 40°C		
IP Rating	IP54		
Diffuser	Opal • Clear		
Finish	Silver • Black • White • Custom RAL		

REG2-1-2-3-4-5-6-7-8

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes

REG2-H-830-C1-AA-D1-FA-1510-200

REG2-M-840-O-BL-D2-X-1160-150

1 Power

17W	H
11W	M
7W	L

2 CCT

80CRI 3000K	830
90CRI 3000K	930
80CRI 4000K	840
90CRI 4000K	940

3 Diffuser

Opal	O
Clear 120°	C
Clear 30°	C1
Clear 12°	C2

4 Finish

Anodised Aluminium	AA
Matt Black	BL
Matt White	WH
Custom RAL	C

5 Mounting

Single	D1
Twin	D2

6 Privacy Screen

None	X
Frosted Acrylic	FA
Custom	C

7 Length 1 (L1)


530mm	530
740mm	740
950mm	950
1160mm	1160
1370mm	1370
1510mm	1510

8 Length 2 (L2)


100mm	100
150mm	150
200mm	200
300mm	300

Technical Drawings

Twin System

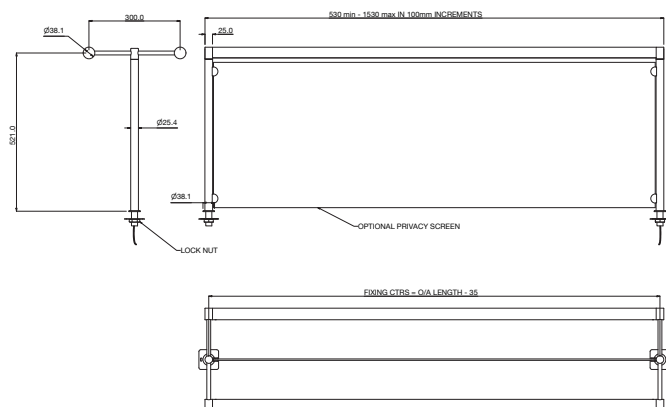

Single System

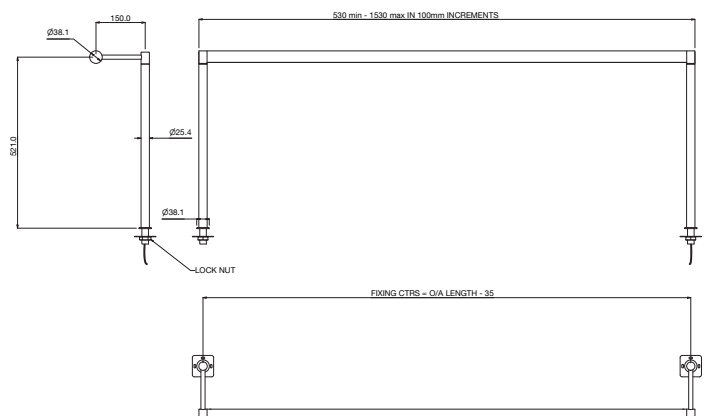

REG2-0722

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com

