



Regis 3



Applications

- Furniture
- Display

Features

- 3000K - 4000K
- 17W - 11W - 7W
- 80 & 90 CRI
- Straight & curved profile
- Made to measure
- Various finishes
- 50mm cut increments
- IP54

Benefits

- Compact in-direct LED lighting
- High quality Luxeon LED technology
- Precision made aluminium frame
- Dimmable
- Remote drivers
- Maintainable
- Re-use luminaire
- 5yr Warranty

Technical Information

	Low	Medium	High
Power (W/m)	7	11	17
Lumen Output (lm/m) Based on 4000K	800	1460	2282
Efficacy (lm/W) Based on 4000K Clear diffuser	69	80	81
Input	24V		
CCT	3000K • 4000K		
CRI	>80 • >90		
LED Chip	Luxeon		
Binning	3 Step MacAdam Elipse		
Control	Switched • 0-10V • DALI • Phase • DMX • Bluetooth		
Beam angle	120°		
Lifetime (LM80)	50,000hrs @25°C		
Operating Temp	-25°C to 40°C		
IP Rating	IP54		
Diffuser	Clear		
Finish	Silver • Black • White • Custom RAL		

Product Code

REG3-1-2-3-4-5-6

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes

REG3-H-930-S-B-XXXX-XXX
REG3-M-830-C-S-XXXX-XXX

1 Power

17W	H
11W	M
7W	L

2 CCT

80CRI 3000K	830
80CRI 4000K	840
90CRI 3000K	930
90CRI 4000K	940

3 Finish

Anodised Aluminium	AA
Matt Black	B
Matt White	W
Silver	S
Custom RAL*	C

4 Shape

Straight	S
Curved	C

5 Length

From Drawing #####


6 Height

From Drawing ###


* For custom RAL colours, put RAL number in product code

Technical Drawings

Curved System

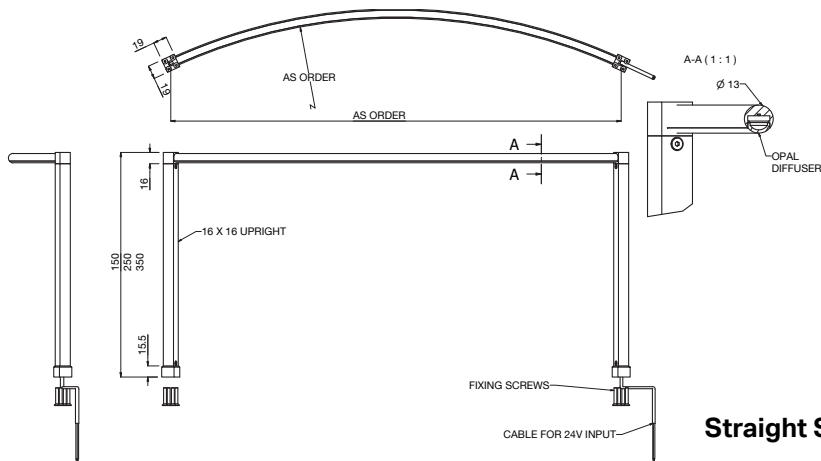

Straight System

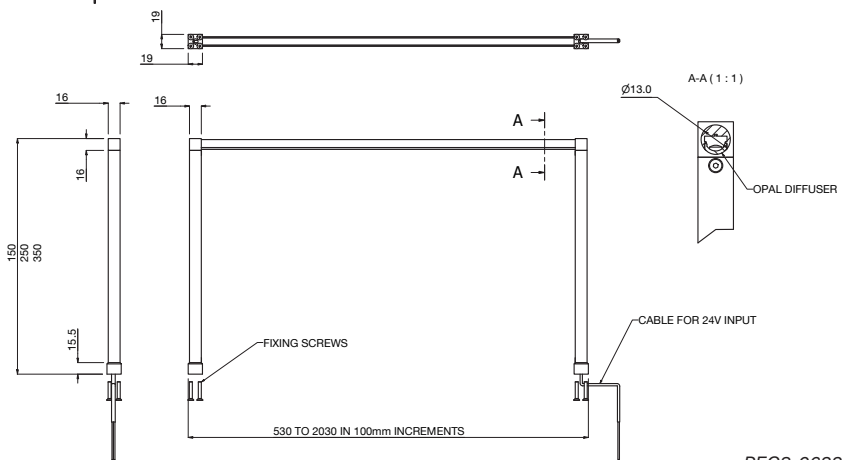

REG3-0622

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempsonlighting.com

kempsonarchitecturallighting.com

