

Mersus 2

Pixel Inground Linear LED



Applications

- Landscapes
- Walkways
- Decorative

Features

- Individual LED colour control
- Programme endless chasing colour scenes
- Scenes set to your requirements
- In-house programming service
- Technical support provided through to install
- Pre-assembled control equipment for easy install
- Curved or Straight Applications
- Endless shapes possible
- 2200K - 4500K, Red, Green, Blue, Amber, RGBW, RGB, 2200K-4500K
- IP67
- Silicone Diffuser
- Easy to Install & Maintain
- 3 years warranty

Technical Information

Shape	Straight or Curved
CCT	Red • Green • Blue • Amber • RGBW • RGB • 2200K • 2700K • 3200K • 4500K • 2200K-4500K
CRI	>80
Input Voltage (V)	24
Power (W/m)	Red, Green, Blue, Amber, White, RGB = 24 RGBW = 30 DW = 20
Control	SPI
Cut Increments	125mm • 100mm for Dynamic White
Operating Temp	-20°C to 55°C
IP Rating	IP67
IK Rating	IK10
Minimum Bend Radius (Curved)	1500mm

Product Code

MER2 - PIX - 1 - 2 - 3

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes

MER2-PIX-822-S-1E
MER2-PIX-R-SC-1S

1 Colour

Red	R	2200K	822
Green	G	2700K	827
Blue	B	3200K	832
Amber	A	4500K	845
RGBW	RGBW	2200K/4500K	22/45
RGBW	RGB		

2 Shape


Straight	S
Curved	C
Straight & Curved	SC

3 Cable Entry

1 End Feed	1E
1 Side Feed	1S

Mersus 2 is manufactured to bespoke shapes and lengths. Please contact our sales team to discuss your requirements.

Specification Drawings

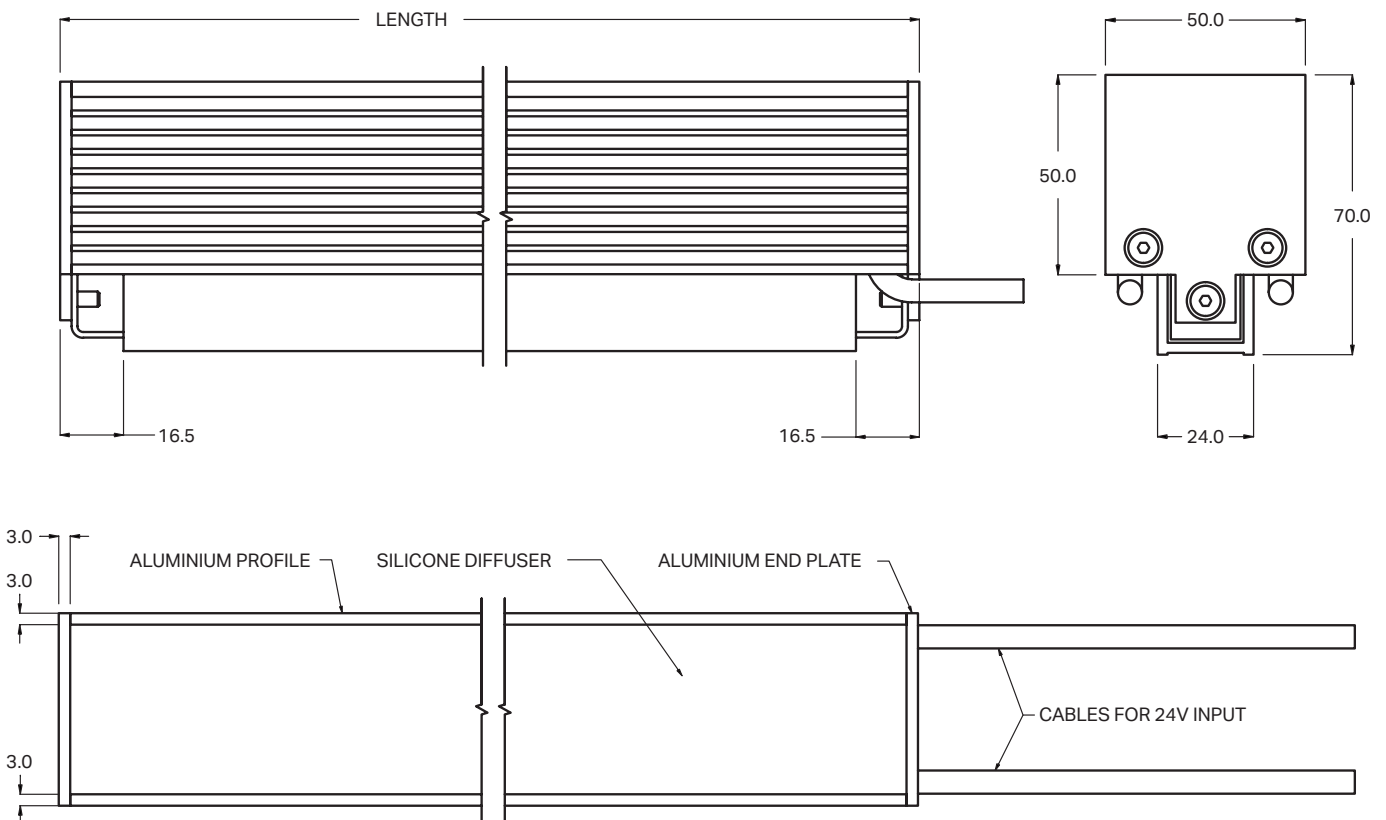

MER2-PIX-0122

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempslighting.com

