

FIG60 A P RGBW















Colour Changing Pendant Luminaire

IP40 Rating

Re-use Luminaire

LM80 50,000hrs

ROHS Compliant

CE Certified

Features

- Colour changing LED suspended luminaire, direct light distribution
- Red, Green, Blue and 4000K or 3000K
- Latest Cree LED technology
- Integral DALI or DMX control gear
- Classic design, lightweight 67mm wide aluminium body with polycarbonate opal diffuser
- Choice of Silver, Black and White body colours as standard with many custom RAL colours available
- Internal reflector constructed from the latest MCPET 99.6% reflective material, resulting in dot and shadow free homogenous light appearance
- Standard and custom continuous lines of light. Squares and rectangles also available.
- Stand alone dimming controller also available inc programming and on-site commissioning to suit

Applications

- Retail
- Hospitality
- Commercial
- Public Realm

Product Options

Control	DALI • DMX • Casambi
сст	RGBW40 • RGBW30
CRI	80CRI White Only
Body Colour	Black • White • Silver • Custom RAL on request
Diffuser Type	Opal
Lengths	Multiple lengths available

Technical Information (based on 881mm fitting)

	LM	Watts per Colour	Watts
Red	587	8.1	40W
Green	1316	11.7	40W
Royal Blue	385	12.2	40W
White 4000k (80CRI)	1742	11.3	40W

Product Code

FIG60-A-P-11-2-3-4

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes


FIG60-A-P-RGBW40-D-9005-1751 FIG60-A-P-RGBW30-X-9003-2042

1 сст		2 Control	
RGBW 3000K	RGBW30	DALI	D
RGBW 4000K	RGBW40	DMX	Χ
		Casambi Bluetooth	В

3 Finish		4 Length* (based on DMX, DALI by request)			
Black	9005		881	2042mm	2042
White	9003	1171mm	1171	2332mm	2332
Grey	9006	1461mm	1461	2622mm	2622
Custom RAL**	RAL#	1751mm	1751	2912mm	2912

^{*}Custom lengths, infills, continuous lines and corners available. ** Custom RAL colours subject to availability and order size. Please enquire with your requirements.

Technical Drawings

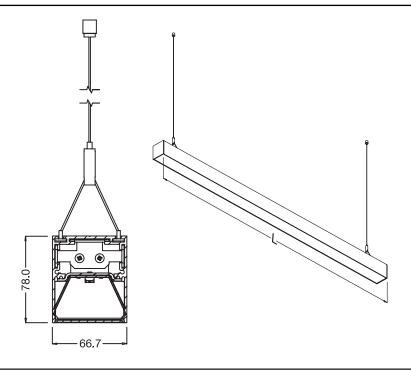

Additional Accessories

3D printed ceiling rose 125mm dia (RAL colour on request) - CR001

FIG60-RGBW40-0223

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance