

Product Code

FIG4040 - A - P - **1** **2** **3** **4** **5** **6** Example Codes

FIG4040-A-P-H-840-0-P-9006-02531

FIG4040-A-P-M-940-B-F-9003-02915

1 Drive Current		2 CCT		3 Control		6 Length	
High (600mA)	H	80CRI - 3000K	827	Switched	S	594mm	594
Medium (400mA)	M	80CRI - 4000K	830	DALI	D	692mm	692
Economy (300mA)	E	90CRI - 3000K	940	0-10	0	790mm	790
		90CRI - 4000K	940	BluetoothCasambi	B	884mm	884
				DMX	X	982mm	982
						1080mm	1080
						1174mm	1174
						1272mm	1272
						1370mm	1370
						1464mm	1464
						1563mm	1563
						1661mm	1661
						1755mm	1755
						1853mm	1853
						1951mm	1951
						2045mm	2045
						2143mm	2143
						2241mm	2241
						2335mm	2335
						2433mm	2433
						2531mm	2531
						2625mm	2625
						2723mm	2723
						2821mm	2821
						2915mm	2915

4 Di user

Frosted
Prismatic

F et Blac 9005
P Signal White 9003
White Aluminium 9006
Custom RAL RAL#

5 Finish


Extras - On Request**

Emergency Module
Motion Sensors

*Custom lengths, infills and continuous lines available.

**Please enquire with your requirements.

Technical Drawings

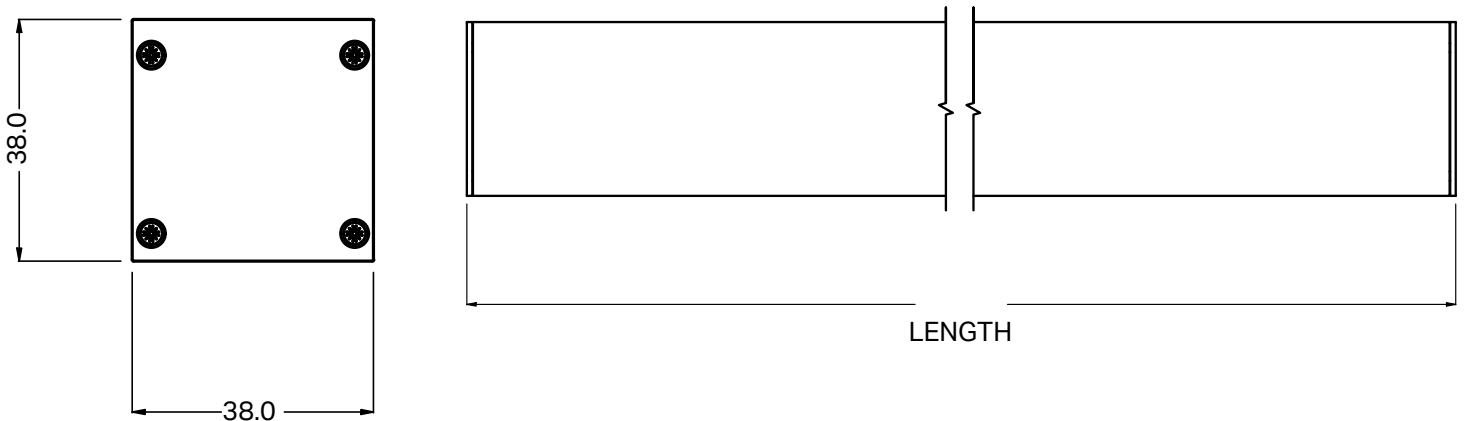

Additional Accessories

3D printed ceiling rose 125mm dia (RAL colour on request) - CR001

PRO4040-1122

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice Please refer to our website for most up to date version



Contact our sales team for further assistance

0113 263 9039

enquiries@lumina.com

