


Figaro 4040 A S

Surface Mounted Luminaire

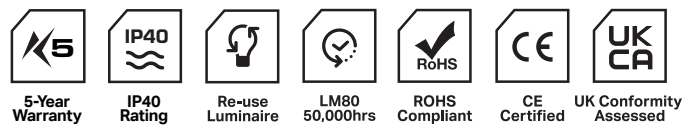

Features

- LED surface mounted luminaire, direct light distribution.
- CCT options of 3000K & 4000K, others available on request.
- Latest Cree LED technology with CRI80 & 90 as standard.
- Sleek design, lightweight 38mm x 38mm aluminium body with frosted or microprismatic diffuser options.
- Choice of black, white and grey finish as standard with many custom RAL colours available.
- Various lengths from 594mm > 2915mm as standard.
- Remote Gear - up to 30mtrs

Product Options

Control	Switched • DALI 2 • (0)1-10V • Bluetooth (Casambi)
CCT	2200K* • 2700K* • 3000K** 3500K* • 4000K** • 5000K*
CRI	>90CRI • >80CRI
Body Colour	Black • White • Silver Custom RAL on request.
Diffuser Type	Frosted • Microprismatic (MCP) (Low UGR)

*On Request ** Standard

Applications

- Retail
- Hospitality
- Educational
- Commercial
- Public Realm

Technical Information

LENGTH	Frosted									Prismatic								
	Low			Medium			High			Low			Medium			High		
	W	lm	lm/w	W	lm	lm/w	W	lm	lm/w	W	lm	lm/w	W	lm	lm/w	W	lm	lm/w
884mm	8	1011	126	10	1404	140	16	1966	123	8	1011	126	10	1404	140	16	1966	123
1272mm	11	1483	135	15	2059	137	23	2883	125	11	1483	135	15	2059	137	23	2883	125
1563mm	14	1853	132	19	2574	135	29	3604	124	14	1853	132	19	2574	135	29	3604	124
1853mm	16	2190	137	22	3042	138	34	4259	125	16	2190	137	22	3042	138	34	4259	125
2045mm	18	2359	131	24	3276	137	37	4586	124	18	2359	131	24	3276	137	37	4586	124
2241mm	19	2595	137	26	3604	139	40	5045	126	19	2595	137	26	3604	139	40	5045	126
2531mm	23	3033	132	31	4212	136	47	5897	125	23	3033	132	31	4212	136	47	5897	125
2723mm	24	3201	133	32	4446	139	50	6224	124	24	3201	133	32	4446	139	50	6224	124
2915mm	26	3471	134	35	4820	138	54	6749	125	26	3471	134	35	4820	138	54	6749	125

Watts (W) Lumens (lm) Efficiency (lm/W)

Data on 4000K/80CRI

Product Code

FIG4040 - A - S - **1** - **2** - **3** - **4** - **5** - **6** *Example Codes*

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

FIG4040-A-S-H-840-O-P-9006-02531

FIG4040-A-S-M-940-B-F-9003-02915


1 Drive Current	2 CCT	3 Control	6 Length
High (600mA) H	80CRI - 3000K 827	Switched S	594mm 594
Medium (400mA) M	80CRI - 4000K 830	DALI D	692mm 692
Economy (300mA) E	90CRI - 3000K 940	0-10V O	790mm 790
	90CRI - 4000K 940	Bluetooth Casambi B	884mm 884
		DMX X	982mm 982
			1080mm 1080
			1174mm 1174
			1272mm 1272
			1370mm 1370
			1464mm 1464
			1563mm 1563
			1661mm 1661
			1755mm 1755
			1853mm 1853
			1951mm 1951
			2045mm 2045
			2143mm 2143
			2241mm 2241
			2335mm 2335
			2433mm 2433
			2531mm 2531
			2625mm 2625
			2723mm 2723
			2821mm 2821
			2915mm 2915

4 Diffuser	5 Finish
Frosted F	Jet Black 9005
Prismatic P	Signal White 9003
	White Aluminium 9006
	Custom RAL RAL#

Extras - On Request**

Emergency Module	<i>*Custom lengths, infills and continuous lines available.</i>
Motion Sensors	<i>**Please enquire with your requirements.</i>

Technical Drawings

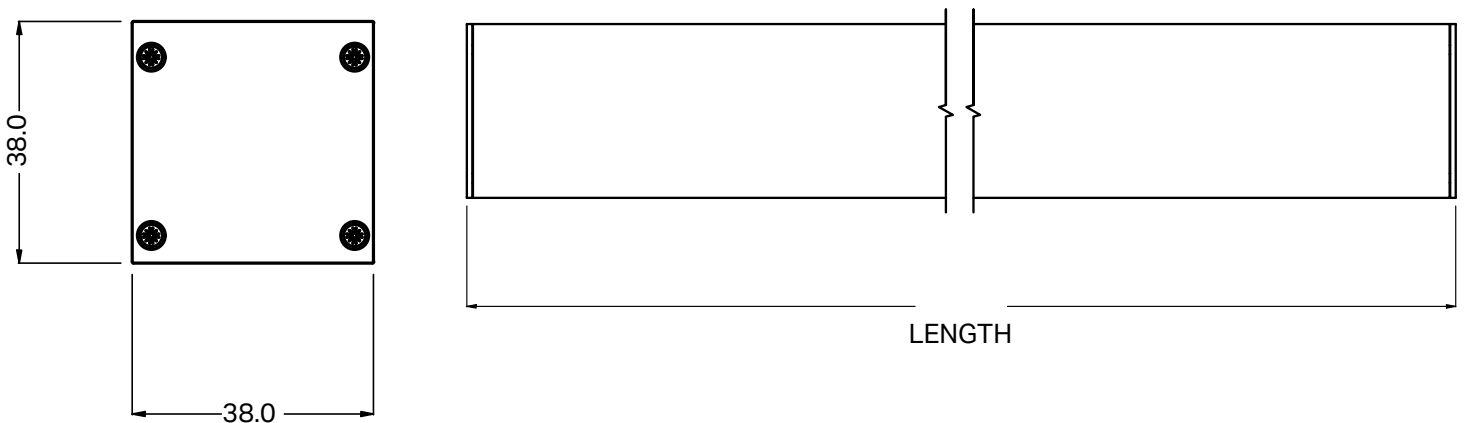

Additional Accessories

3D printed ceiling rose 125mm dia (RAL colour on request) - **CR001**

PRO4040-1122

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempslighting.com

