




Figaro 40 B P

Direct & Indirect LED Luminaire

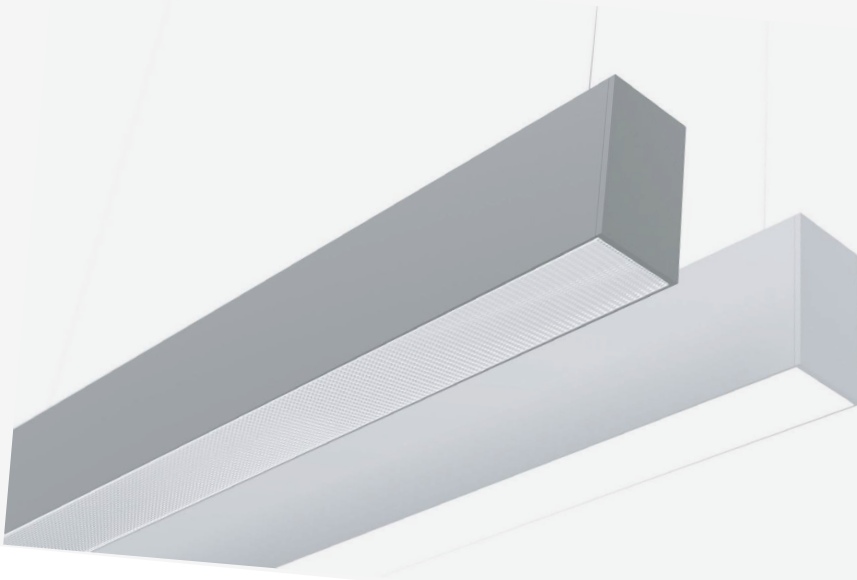

Features

- Direct/indirect LED luminaire
- CCT 3000K, 4000K, others available on request (subject to quantity)
- Sleek lightweight design, 45mm width x 82mm height, Aluminium body with frosted or microprismatic diffuser options
- Various indirect optics available on request
- Choice of Silver, Black and White body colours as standard with many custom RAL colours available
- UGR <19
- Various lengths from 594mm > 2912mm as standard
- Integral gear

Applications

- Retail
- Hospitality
- Educational
- Commercial
- Public Realm

Product Options

Control	Switched • DALI 2 • (0)1-10V • Bluetooth (Casambi)
CCT	2200K* • 2700K* • 3000K** 3500K* • 4000K** • 5000K*
CRI	>90CRI • >80CRI
Body Colour	Black • White • Silver Custom RAL on request.
Diffuser Type	Opal • Microprismatic (MCP) (Low UGR)
Emergency*	1461mm and above

*On Request ** Standard

Technical Information - Lumen and Wattage Data

Data based on 4000K 80CRI:

4000K	OPAL									MCP								
CRI80	Low			Medium			High			Low			Medium			High		
Length	Watts	Lumen	LM/W	Watts	Lumen	LM/W	Watts	Lumen	LM/W	Watts	Lumen	LM/W	Watts	Lumen	LM/W	Watts	Lumen	LM/W
594	9.2	1418	154	12.5	1659	133	19.2	2471	129	9.2	1418	154	12.5	1659	133	19.2	2471	129
881	14.3	2193	153	19.3	2563	133	29.7	3835	129	14.3	2193	153	19.3	2563	133	29.7	3835	129
1171	19.3	2968	154	26.1	3467	133	40.3	5198	129	19.3	2968	154	26.1	3467	133	40.3	5198	129
1461	24.3	3743	154	32.9	4371	133	50.8	6562	129	24.3	3743	154	32.9	4371	133	50.8	6562	129
1751	29.4	4518	154	39.7	5275	133	61.3	7926	129	29.4	4518	154	39.7	5275	133	61.3	7926	129
2042	34.4	5293	154	46.6	6179	133	71.8	9289	129	34.4	5293	154	46.6	6179	133	71.8	9289	129
2332	39.5	6068	154	53.4	7082	133	82.3	10653	129	39.5	6068	154	53.4	7082	133	82.3	10653	129
2622	44.5	6843	154	60.2	7986	133	92.8	12017	129	44.5	6843	154	60.2	7986	133	92.8	12017	129
2912	49.5	7618	154	67.0	8890	133	103.3	13380	130	49.5	7618	154	67.0	8890	133	103.3	13380	130

3000K	OPAL									MCP								
CRI80	Low			Medium			High			Low			Medium			High		
Length	Watts	Lumen	LM/W	Watts	Lumen	LM/W	Watts	Lumen	LM/W	Watts	Lumen	LM/W	Watts	Lumen	LM/W	Watts	Lumen	LM/W
594	9.2	1319	143	12.5	1543	123	19.2	2298	120	9.2	1319	143	12.5	1543	123	19.2	2298	120
881	14.3	2039	143	19.3	2384	124	29.7	3567	120	14.3	2039	143	19.3	2384	124	29.7	3567	120
1171	19.3	2760	143	26.1	3224	124	40.3	4834	120	19.3	2760	143	26.1	3224	124	40.3	4834	120
1461	24.3	3481	143	32.9	4065	124	50.8	6103	120	24.3	3481	143	32.9	4065	124	50.8	6103	120
1751	29.4	4202	143	39.7	4906	124	61.3	7371	120	29.4	4202	143	39.7	4906	124	61.3	7371	120
2042	34.4	4922	143	46.6	5746	123	71.8	8639	120	34.4	4922	143	46.6	5746	123	71.8	8639	120
2332	39.5	5643	143	53.4	6586	123	82.3	9907	120	39.5	5643	143	53.4	6586	123	82.3	9907	120
2622	44.5	6364	143	67.0	7427	123	92.8	11176	120	44.5	6364	143	60.2	7427	123	92.8	11176	120
2912	49.5	7085	143	60.2	8268	123	103.3	12443	120	49.5	7085	143	67.0	8268	123	103.3	12443	120

Product Code

FIG40-B-P-1-2-3-4-5-6

Create your product code by choosing your specification from the product areas.
Final example codes are shown to the right.


Example Codes

FIG40-B-P-H-840-0-P-9006-XXXX
FIG40-B-P-M-930-B-O-9003-XXXX

1 Drive Current	2 CCT	3 Control	4 Diffuser
High (600mA) H	80 CRI - 3000K 830	Switched S	Opal O
Medium (400mA) M	80 CRI - 4000K 840	DALI D	Micro-Prismatic P
Low (300mA) L	90 CRI - 3000K 930	0-10V 0	
	90 CRI - 4000K 940	Bluetooth Casambi B	
5 Finish	6 Length*	Extras - On Request***	
Jet Black 9005	XXXXmm XXXX	3hr Emergency	
Signal White 9003		Sensors	
White Aluminium 9006			
Custom RAL** RAL#			

*Custom lengths, infills and continuous runs available. ** Custom RAL colours subject to availability and order size
***Please enquire with your requirements.

Technical Drawings

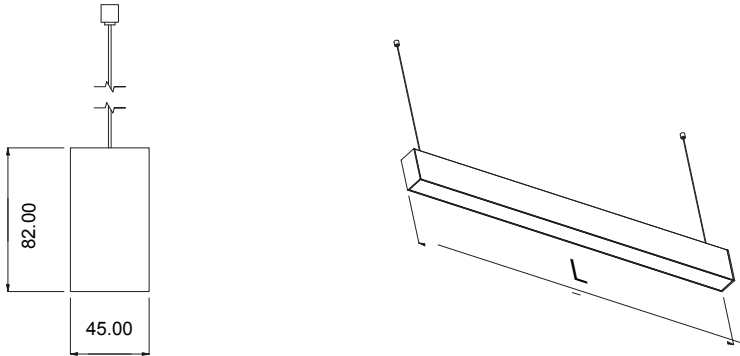

Additional Accessories

3D printed ceiling rose 125mm dia (RAL colour on request) - CR001

FIG40-B-P-1122

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempslighting.com