

Figaro 40 C

Recessed Trimmed



Features

- LED recessed luminaire, direct light distribution.
- CCT 3000K, 4000K, others available on request (subject to quantity).
- Latest Cree LED technology with CRI80 & 90 as standard.
- Sleek lightweight design, 61 mm width x 70mm height, Aluminium body with frosted or microprismatic diffuser options.
- Choice of silver, black and white body colours as standard with many custom RAL colours available.
- Various lengths from 607mm > 2925mm
- Integral gear.

Applications

- Retail
- Hospitality
- Educational
- Commercial
- Public Realm

Product Options

Control	Switched • DALI 2 • (0)1-10V • Bluetooth (Casambi)
CCT	2200K* • 2700K* • 3000K** • 3500K* • 4000K** • 5000K*
CRI	>90CRI • >80CRI
Body Colour	Black • White • Silver Custom RAL on request.
Diffuser Type	Opal • Microprismatic (MCP) (Low UGR)
Emergency*	Available on Lengths above 1572

*On Request ** Standard

Technical Information

LENGTH	Opal									Prismatic								
	Low			Medium			High			Low			Medium			High		
	W	lm	lm/w	W	lm	lm/w	W	lm	lm/w	W	lm	lm/w	W	lm	lm/w	W	lm	lm/w
894mm	8	1011	126	10	1404	140	16	1966	123	8	1011	126	10	1404	140	16	1966	123
1282mm	11	1483	135	15	2059	137	23	2883	125	11	1483	135	15	2059	137	23	2883	125
1572mm	14	1853	132	19	2574	135	29	3604	124	14	1853	132	19	2574	135	29	3604	124
1863mm	16	2190	137	22	3042	138	34	4259	125	16	2190	137	22	3042	138	34	4259	125
2055mm	18	2359	131	24	3276	137	37	4586	124	18	2359	131	24	3276	137	37	4586	124
2251mm	19	2595	137	26	3604	139	40	5045	126	19	2595	137	26	3604	139	40	5045	126
2541mm	23	3033	132	31	4212	136	47	5897	125	23	3033	132	31	4212	136	47	5897	125
2733mm	24	3201	133	32	4446	139	50	6224	124	24	3201	133	32	4446	139	50	6224	124
2925mm	26	3471	134	35	4820	138	54	6749	125	26	3471	134	35	4820	138	54	6749	125

Product Code

FIG40-C - 1 - 2 - 3 - 4 - 5 - 6

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes

FIG40-C-H-840-O-P-9006-XXXX

FIG40-C-M-930-B-O-9003-XXXX

1 Drive Current

High (600mA)	H
Medium (400mA)	M
Low (300mA)	L

2 CCT

80 CRI - 3000K	830
80 CRI - 4000K	840
90 CRI - 3000K	930
90 CRI - 4000K	940

3 Control

Switched	S
DALI	D
0-10V	O
Bluetooth Casambi	B

4 Diffuser

Opal	O
Micro-Prismatic	P

5 Finish

Jet Black	9005
Signal White	9003
White Aluminium	9006
Custom RAL**	RAL#

6 Length*

XXXXmm	XXXX
--------	-------------



Extras - On Request***

Emergency Module
Sensors

*Custom lengths, infills and continuous runs available. ** Custom RAL colours subject to availability and order size

***Please enquire with your requirements.

Technical Drawings

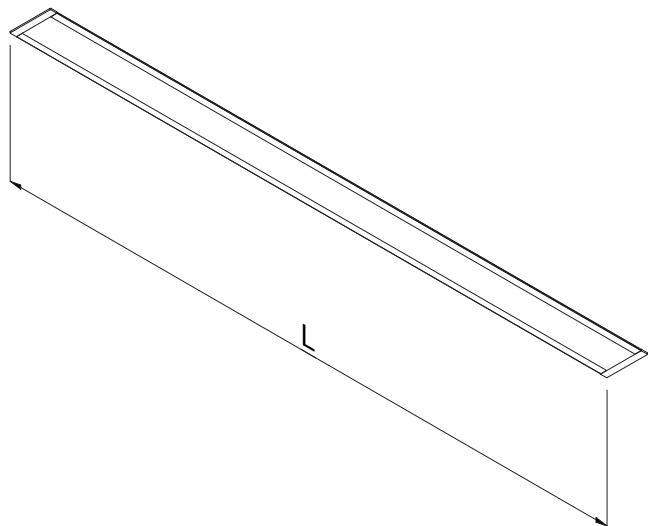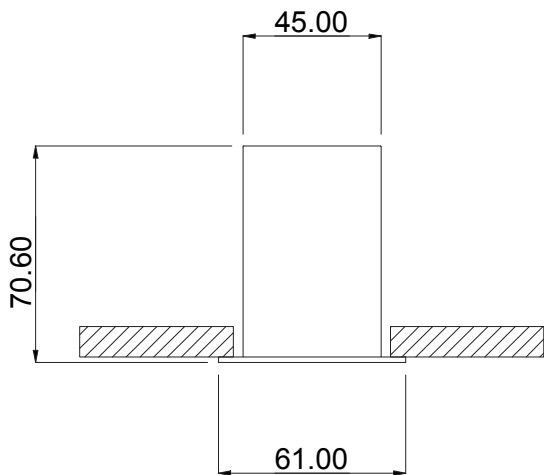

Additional Accessories

3D printed ceiling rose 125mm dia (RAL colour on request) - CR001

FIG40-C-1122

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempslighting.com

