

K E M P S

ARCHITECTURAL LIGHTING

A photograph of three people (two women and one man) smiling and looking upwards. They are standing in front of a building with the word 'KEMPS' visible on its facade. The image is dimmed to serve as a background for the text.


When you work with Kemp's

- A Guaranteed understanding with creativity.
- Exceptional visual results.
- British and European manufacturing standards.
- LED technology from renowned and respected brands.

Façade



Inground Walkover Linear

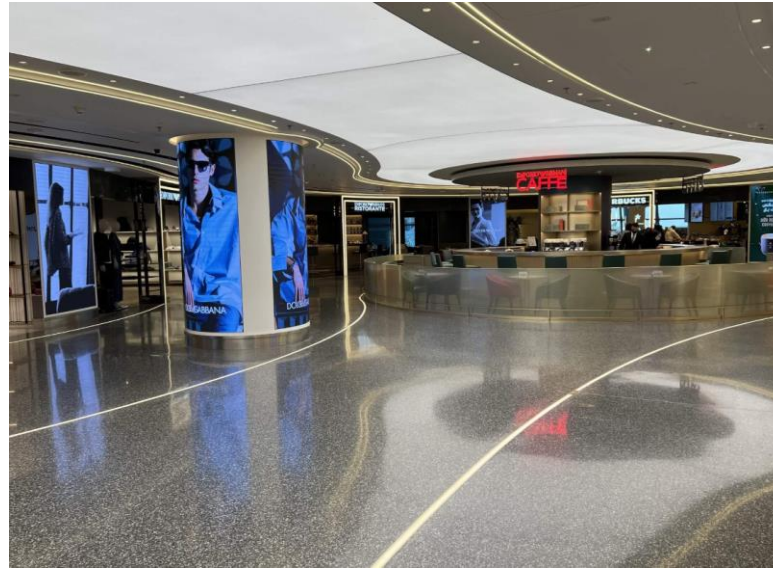

Flex Neon




Cove



Regen Solution



Commercial Linear

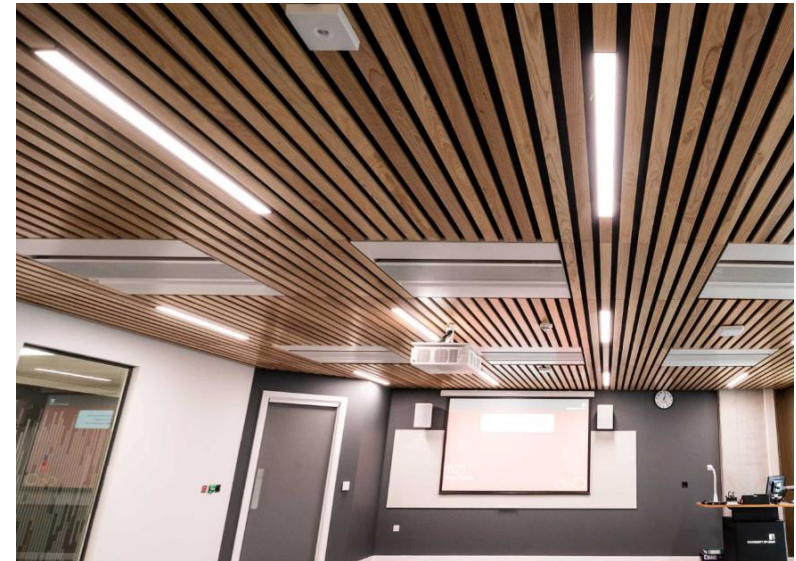

Exterior Linear LED



Alphaeus

Facades – Wall Wash - Landscapes
IP67, 5 Year Warranty, Single Colour Luxeon ZES Chip



Optics 10° - 25° - 32° - 45° - 50°x11°
12 lengths available 128mm to 1228mm
Up to 50m Driver Installation
Multiple Power Options up to 5500Lumen @ 48w
Multiple Static Colour Options + Dynamic White Variation
DALI – 0-10V – Casambi - DMX – Phase control
Multiple Finishes including custom colours
Cowl & Anti Glare Accessories
Custom Brackets Available

Fortis 2

Facades – Wall Wash - Landscapes – Under Bench
IP66, 5 Year Warranty. Board Mounted Luxeon LED Chips



Available 72mm to 2526mm (custom @ 50mm increments)
Opal Diffuser Option up to 1369 Lm per mtr
Clear Diffuser Option up to 2200 Lm per mtr
Multiple Static Colour Options
DALI –DMX
Multiple Finishes including custom colours
Cowl & Anti Glare Accessories
Custom Brackets Available
Re-Use Luminaire

Fortis 3

Facades – Wall Wash – Landscapes
IP66, 5 Year Warranty, Single Colour Souel Z5 Chip




Optics 15° • 25° • 35° • 45° • 60° • 15°x50°
16 lengths available 168mm to 2552mm
Up to 50m Driver Installation
Multiple Power Options up to 3439Lumen @ 32w
Multiple Static Colour Options + Dynamic White Variation
DALI – 0-10V – Casambi - DMX – Phase control
Multiple Finishes including custom colours
Cowl & Anti Glare Accessories
Custom Brackets Available

Exterior Linear LED

Proteus

Facades – Planters – Handrail – Furniture

IP54/IP67, 5 Year Warranty, Board Mounted Luxeon LED Chips

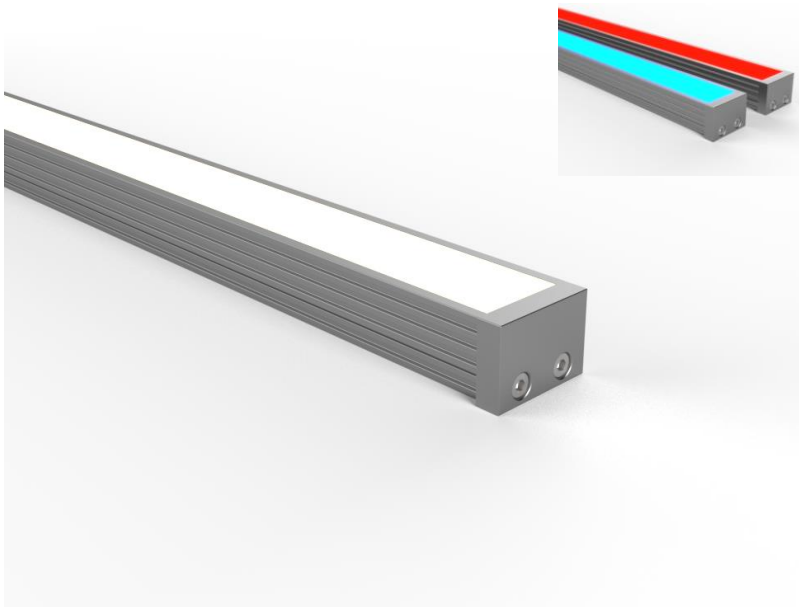

Available 72mm to 2975mm (custom @ 50mm increments)

Opal Diffuser Option up to 1369 Lm per mtr @ 17W

Clear Diffuser Option up to 2282 Lm per mtr @ 17W

12° or 120° Beam angles

Multiple Static Colour Options

Switched – 0-10V – DALI – Phase – DMX – Bluetooth


Fixed or Adjustable Brackets

Available in RGB & RGBW

Re-Use Luminaire




Proteus M

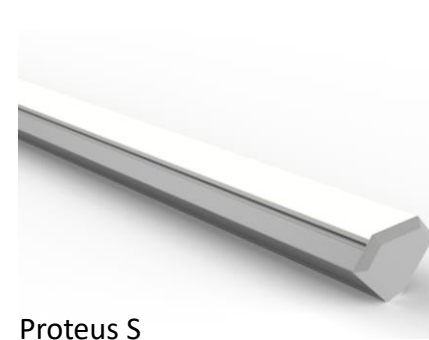


Proteus S



Proteus RXL

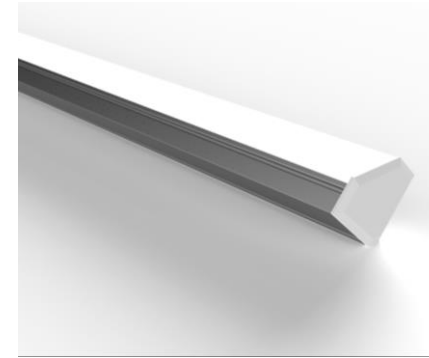

Proteus SXL

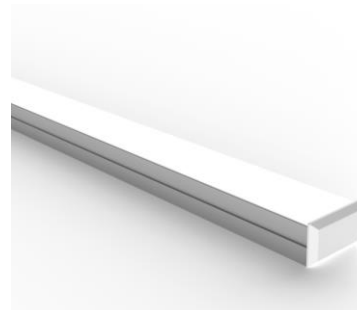

Proteus SXL





Proteus TM

Exterior Linear LED



Flexus

Counter – Facades – decorative – Landscape
Up to IP68 & 5 Year Warranty, Nichia/Epistar LED Chips

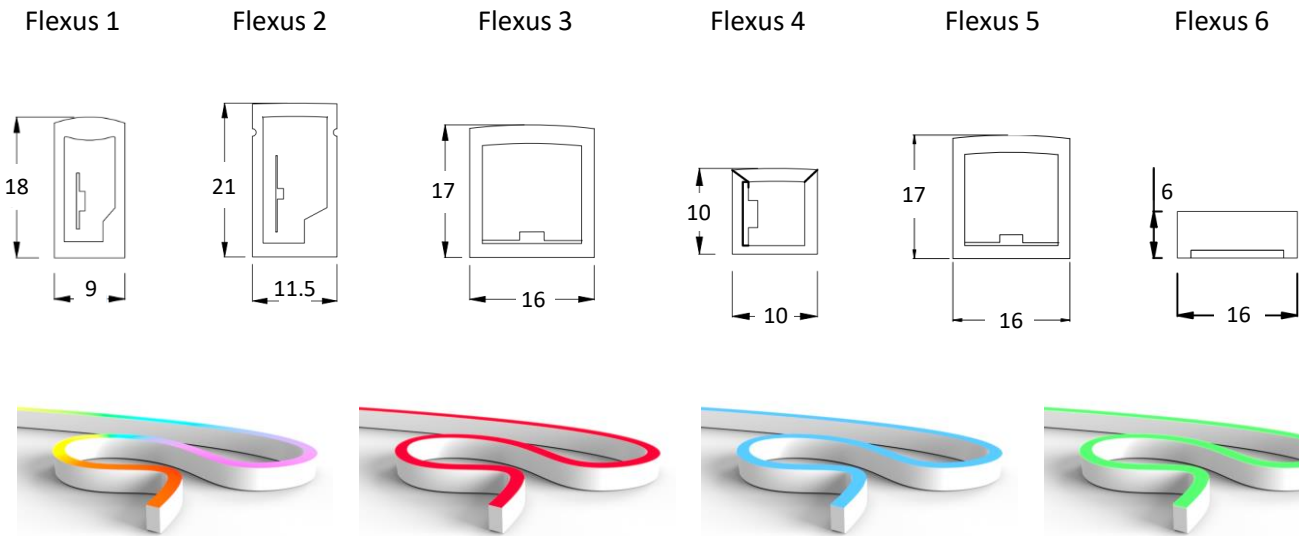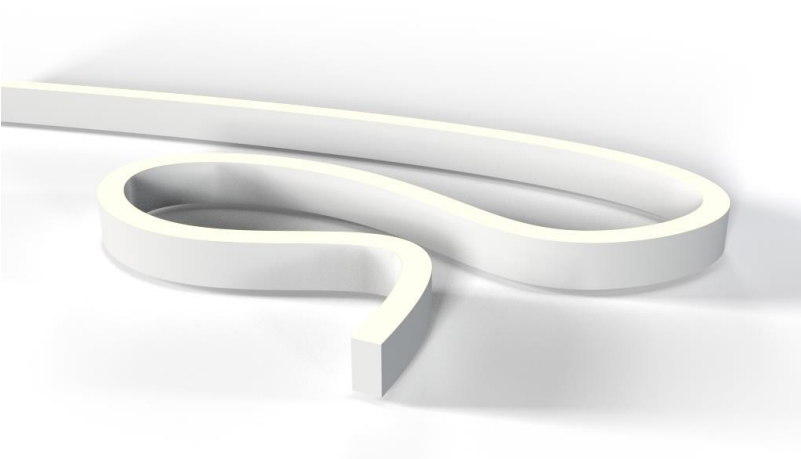

Available in PVC or Silicone across 6 variations
Vertical or Horizontal Bends
Static Colours
Dim to Warm & Dynamic White
RGB, RGBW & Pixelated
Cut Points range from 83mm
Sauna Version available operating up to 90°C Max
Range of profile accessories

Most Popular

Flexus 2

12W p/mtr @ 350lm
120mm Diameter Minimum Bend
120° Beam Angle
83mm Cut Points or 125mm RGB
Static Colours
Dim to Warm & Dynamic White
RGB, RGBW & Pixelated

Flexus 3

12W p/mtr @ 450lm
300mm Diameter Minimum Bend
120° Beam Angle
83mm Cut Points or 125mm RGB
Static Colours
Dim to Warm & Dynamic White
RGB, RGBW & Pixelated


Exterior Linear LED



Mersus

Landscape – Walkways & Drives

IP67, Rated IK10, UV Resistant, 3 Year Warranty,

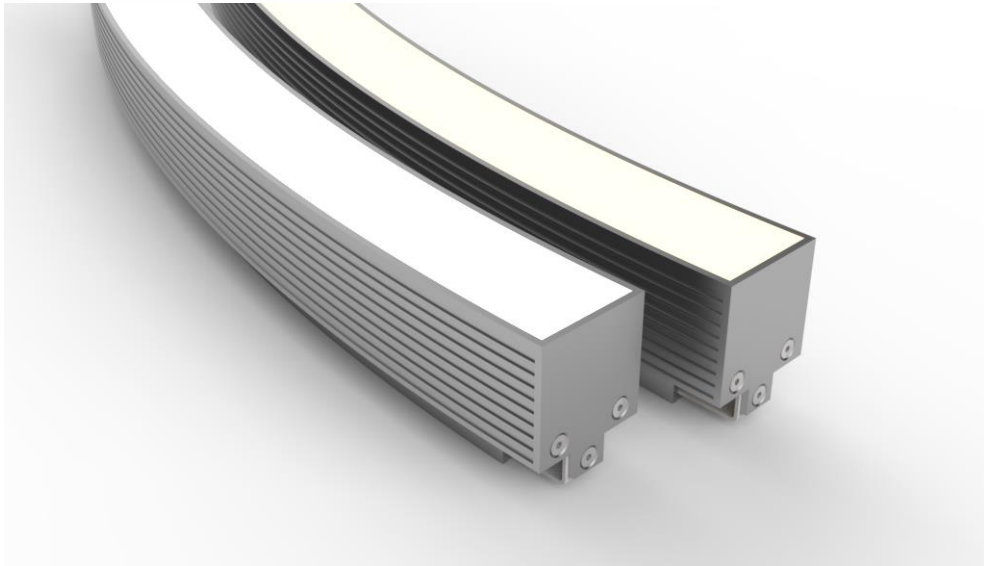

Curved or Straight Edge Application (Minimum Bend Radius 1500mm)

2400K to 4500K - Red, Green, Blue & Amber


Dynamic White

RGB


RGBW

Pixilated


-20 to 55°C Operating Temperature

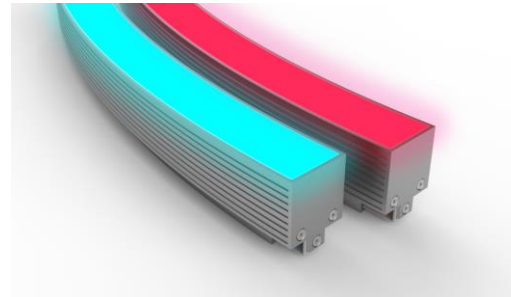


Mersus 2

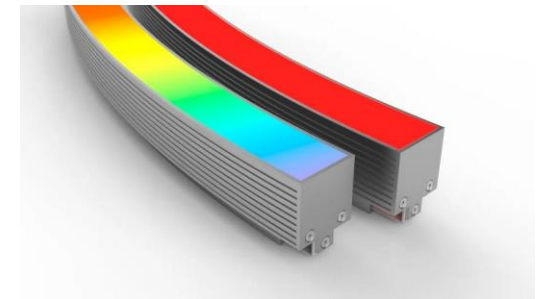

Mersus 2 PIX

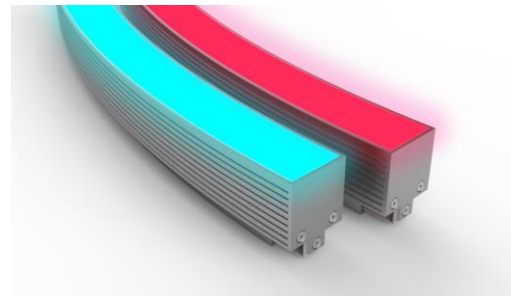

Mersus 2 RGB

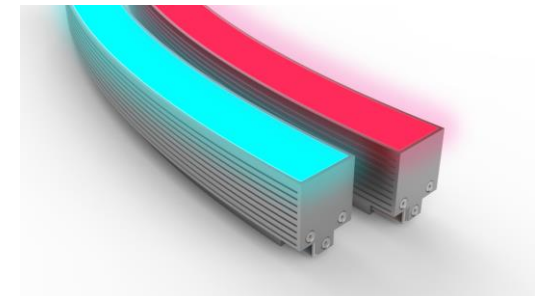

Mersus 2 RGBW

Interior Linear LED



Figaro Suspended (Direct & Direct/indirect)

Office – School – Retail – Hospitality – Public Realm – Health
System Luminaire, 5 Year Warranty, Multiple Variants & Combinations
Latest CREE LED Technology.



Technical Information

Length	Opal									Prismatic								
	Economy			Medium			High			Economy			Medium			High		
	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W
881mm	15	1581	108	20	2238	110	30	3147	103	15	1567	107	20	2218	110	30	3118	102
1171mm	19	2099	108	27	2972	110	40	4179	103	19	2081	107	27	2945	110	40	4141	102
1461mm	24	2618	108	34	3706	110	50	5211	103	24	2595	107	34	3673	110	50	5164	102
1751mm	29	3138	108	40	4443	110	60	6247	103	29	3111	107	40	4403	110	60	6190	102
2042mm	34	3657	108	47	5177	110	70	7279	103	34	3625	107	47	5131	110	70	7213	102
2332mm	39	4176	108	54	5911	110	80	8311	103	39	4139	107	53	5858	110	80	8236	102
2622mm	44	4694	108	60	6645	110	90	9343	103	44	4653	107	60	6586	110	90	9259	102
2912mm	48	5213	108	67	7379	110	100	10376	103	48	5167	107	67	7313	110	100	10282	102

Watts (W) Lumens (lm) Efficiency (lm/W)

Data on 4000K/80CRI

- Matt Opal or Micro Prismatic Diffusers (Low UGR)
- 881mm to 2912mm Module Lengths (15Watt to 100W)
- 3000K or 4000K Variants (80 or 90 CRI)
- 2200K, 2700K, 3500K, 5000K on request
- Continuous or Stand Alone
- Emergency Options including DALI Monitored
- Direct or Direct/Indirect Variations
- Integral Drivers – Switched, DALI, 0-10V, Casambi
- Sensor Solutions
- 90° Corners
- Fitted as standard with MC-PET (99.6% reflective sheet).
- Choice of Finishes including custom RAL




Interior Linear LED



Figaro Surface

Office – School – Retail – Hospitality – Public Realm – Health
System Luminaire, 5 Year Warranty, Multiple Variants & Combinations
Latest CREE LED Technology.

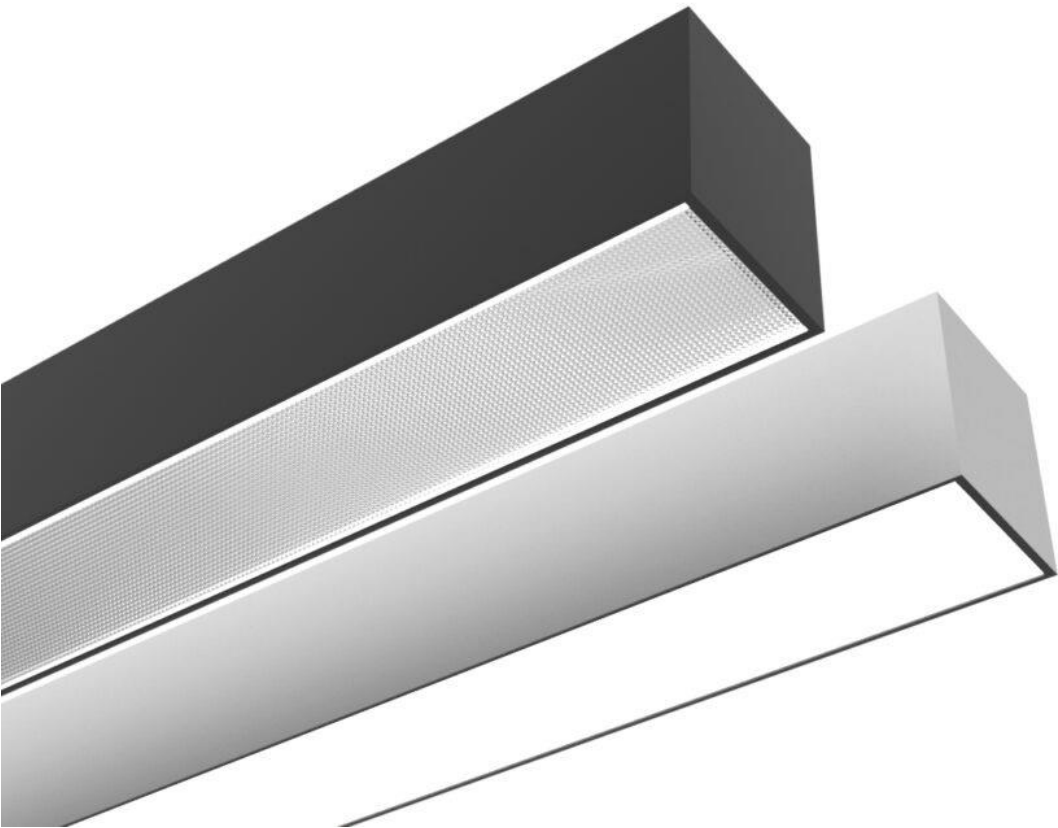

Technical Information

Length	Opal									Prismatic								
	Economy			Medium			High			Economy			Medium			High		
	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W
881mm	15	1581	108	20	2238	110	30	3147	103	15	1567	107	20	2218	110	30	3118	102
1171mm	19	2099	108	27	2972	110	40	4179	103	19	2081	107	27	2945	110	40	4141	102
1461mm	24	2618	108	34	3706	110	50	5211	103	24	2595	107	34	3673	110	50	5164	102
1751mm	29	3138	108	40	4443	110	60	6247	103	29	3111	107	40	4403	110	60	6190	102
2042mm	34	3657	108	47	5177	110	70	7279	103	34	3625	107	47	5131	110	70	7213	102
2332mm	39	4176	108	54	5911	110	80	8311	103	39	4139	107	53	5858	110	80	8236	102
2622mm	44	4694	108	60	6645	110	90	9343	103	44	4653	107	60	6586	110	90	9259	102
2912mm	48	5213	108	67	7379	110	100	10376	103	48	5167	107	67	7313	110	100	10282	102

Watts (W) Lumens (lm) Efficiency (lm/W)

Data on 4000K/80CRI

- Matt Opal or Micro Prismatic Diffusers (Low UGR)
- 881mm to 2912mm Module Lengths (15Watt to 100W)
- 3000K or 4000K Variants (80 or 90 CRI)
- 2200K, 2700K, 3500K, 5000K on request
- Continuous or Stand Alone
- Emergency Options including DALI Monitored
- Direct or Direct/Indirect Variations
- Integral Drivers – Switched, DALI, 0-10V, Casambi
- Sensor Solutions
- 90° Corners
- Fitted as standard with MC-PET (99.6% reflective sheet).
- Choice of Finishes including custom RAL




Interior Linear LED



Figaro Recessed

Office – School – Retail – Hospitality – Public Realm – Health
System Luminaire, 5 Year Warranty, Multiple Variants & Combinations
Latest CREE LED Technology.

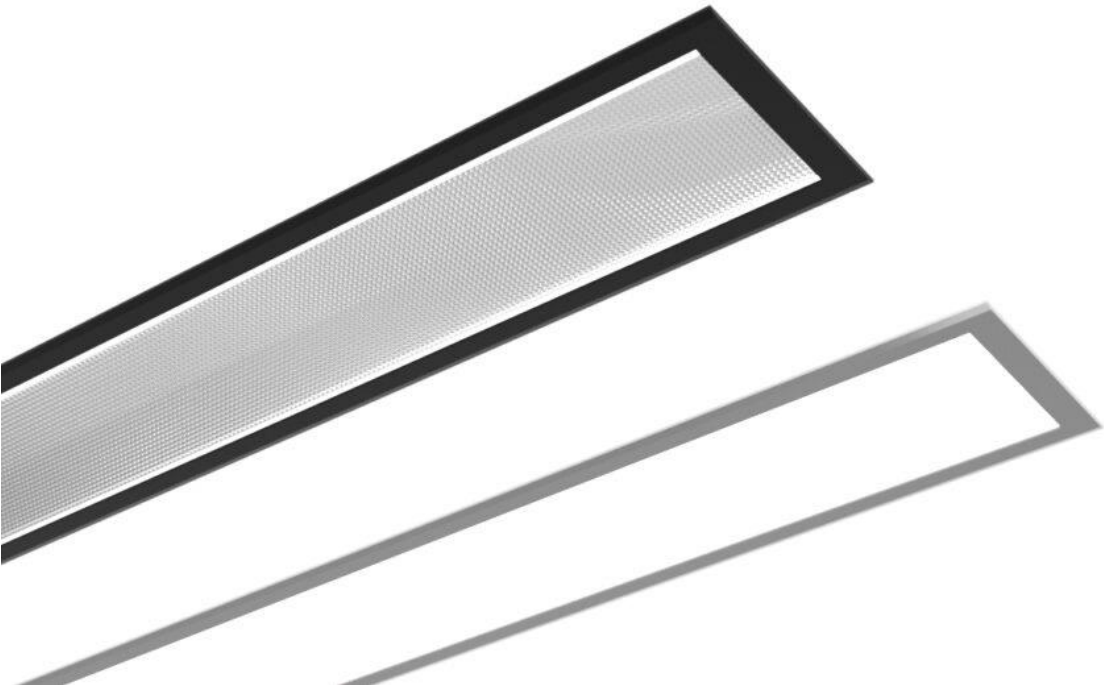

Technical Information

Length	Opal									Prismatic								
	Economy			Medium			High			Economy			Medium			High		
	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W	W	lm	lm/W
881mm	15	1581	108	20	2238	110	30	3147	103	15	1567	107	20	2218	110	30	3118	102
1171mm	19	2099	108	27	2972	110	40	4179	103	19	2081	107	27	2945	110	40	4141	102
1461mm	24	2618	108	34	3706	110	50	5211	103	24	2595	107	34	3673	110	50	5164	102
1751mm	29	3138	108	40	4443	110	60	6247	103	29	3111	107	40	4403	110	60	6190	102
2042mm	34	3657	108	47	5177	110	70	7279	103	34	3625	107	47	5131	110	70	7213	102
2332mm	39	4176	108	54	5911	110	80	8311	103	39	4139	107	53	5858	110	80	8236	102
2622mm	44	4694	108	60	6645	110	90	9343	103	44	4653	107	60	6586	110	90	9259	102
2912mm	48	5213	108	67	7379	110	100	10376	103	48	5167	107	67	7313	110	100	10282	102


Watts (W) Lumens (lm) Efficiency (lm/W) Data on 4000K/80CRI

- Matt Opal or Micro Prismatic Diffusers (Low UGR)
- 881mm to 2912mm Module Lengths (15Watt to 100W)
- 3000K or 4000K Variants (80 or 90 CRI)
- 2200K, 2700K, 3500K, 5000K on request
- Continuous or Stand Alone
- Emergency Options including DALI Monitored
- Direct or Direct/Indirect Variations
- Integral Drivers – Switched, DALI, 0-10V, Casambi
- Sensor Solutions
- 90° Corners
- Fitted as standard with MC-PET (99.6% reflective sheet).
- Choice of Finishes including custom RAL




Interior Linear LED

Proteus

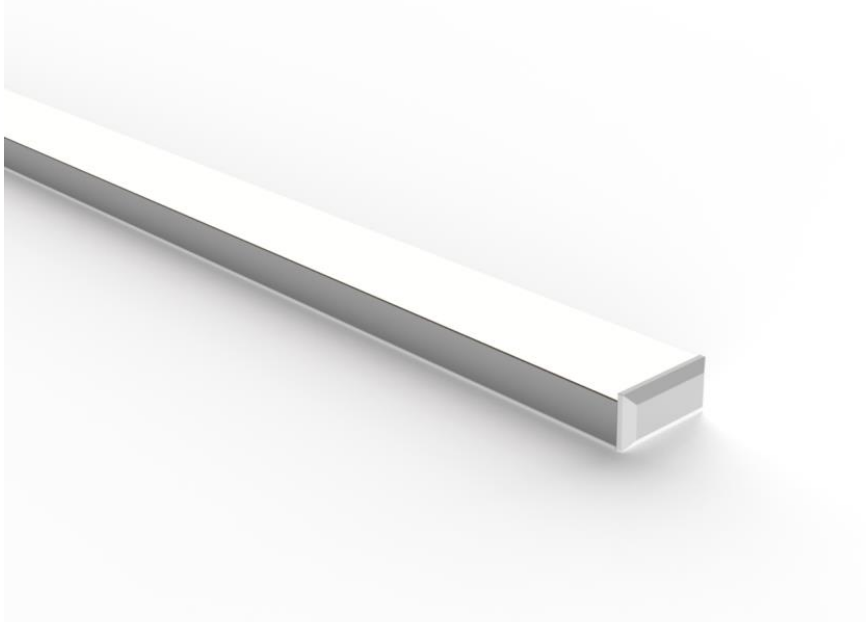

Opal Diffuser Option
Clear Diffuser Option
12° or 120° Beam angles
Multiple Static Colour Options
Switched – 0-10V – DALI – Phase – DMX – Bluetooth
Available in RGB & RGBW

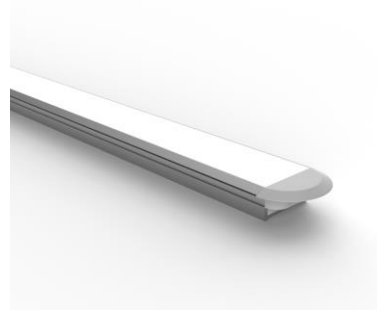

Proteus B




Proteus BXL



Proteus D



Proteus M Lite

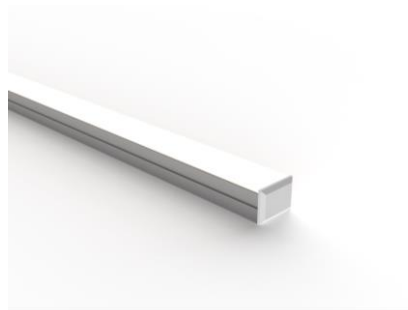

Proteus R



Proteus RXL Crescent

Interior Linear LED

Regis

General Lighting – Furniture - Display

IP54/IP65, 5 Year Warranty. Board Mounted Luxeon LED Chips



Opal Diffuser Option
Clear Diffuser Option
120° 30° or 12° Beam angles
Multiple Power Options
2200K to 5700K
520mm to 3020mm Lengths
Switched – 0-10V – DALI – Phase – DMX – Bluetooth
Straight or 90° Bend



Regis 1




Regis 2



Regis 3



Regis 5

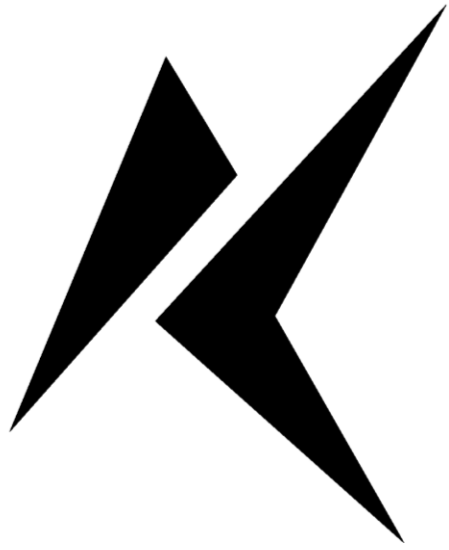

K E M P S

ARCHITECTURAL LIGHTING

Thank You