



Flexus 9

Twin Side Glow



Applications

- Signage
- Facades
- Sculptures
- Decorative

Features

- Bi domed shape
- Vertical bending
- High quality LED with homogenous appearance
- 120mm min bend diameter
- Interior or exterior
- IP67
- Power from one or both ends
- Environmentally friendly
- Energy efficient
- UV resistant
- PVC material

Technical Information

Lumen Output (lm/m)	480
Power (W/m)	9 (single colour) • 12 (RGB)
Material	PVC
Bending	Vertical
CCT	2200K • 2700K • 3000K • 3500K • 4000K • 5700K • Red • Green • Blue • Amber • RGB
CRI	80
Control	Switched • 0-10V • DALI • DMX • Phase • Bluetooth
Beam Angle	320°
LED	Nichia • Epistar
Binning	3 Step MacAdam
Input Voltage (V)	24
Max length (1 entry)	13m
Cutting	83mm (White + Blue + Green + RGB) • 125mm (Red + Amber)
IP Rating	IP67
Operating Ambient Temp	-40°C to 45°C
Lifetime	>50,000hrs
Connection	5mtr tail to bare end

Product Code

FX9 - 1 - 2 - 3 - 4 - 5

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes

FX9-830-VB-1E-67-XXXX

FX9-827-VB-1E-67-XXXX

1 CCT

2200K	822	Red	R
2700K	827	Green	G
3000K	830	Blue	B
3500K	835	Amber	A
4000K	840	RGB	RGB
5700K	857		

2 Bend

Vertical VB

3 Cable Entry

1 End Feed 1E
2 End Feed 2E





4 IP Rating

IP67 67

5 Length

XXXXmm XXXX


Specification Drawings

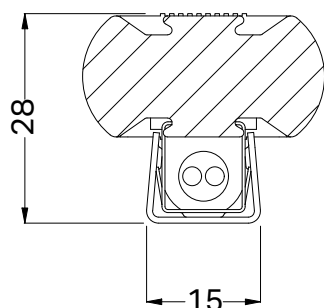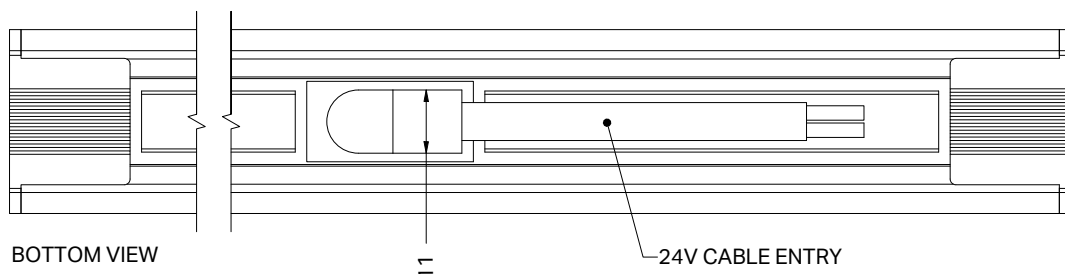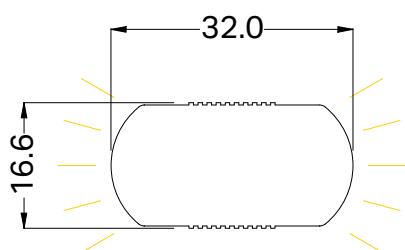

MOUNTING CLIP -
FX9001

⚠ Assembly Caution

Min Bend Dia is 120mm

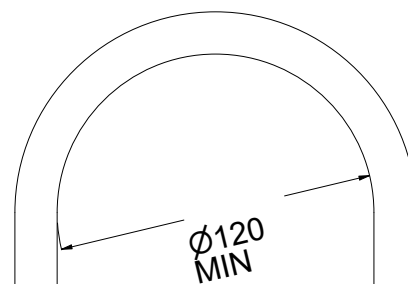

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com