



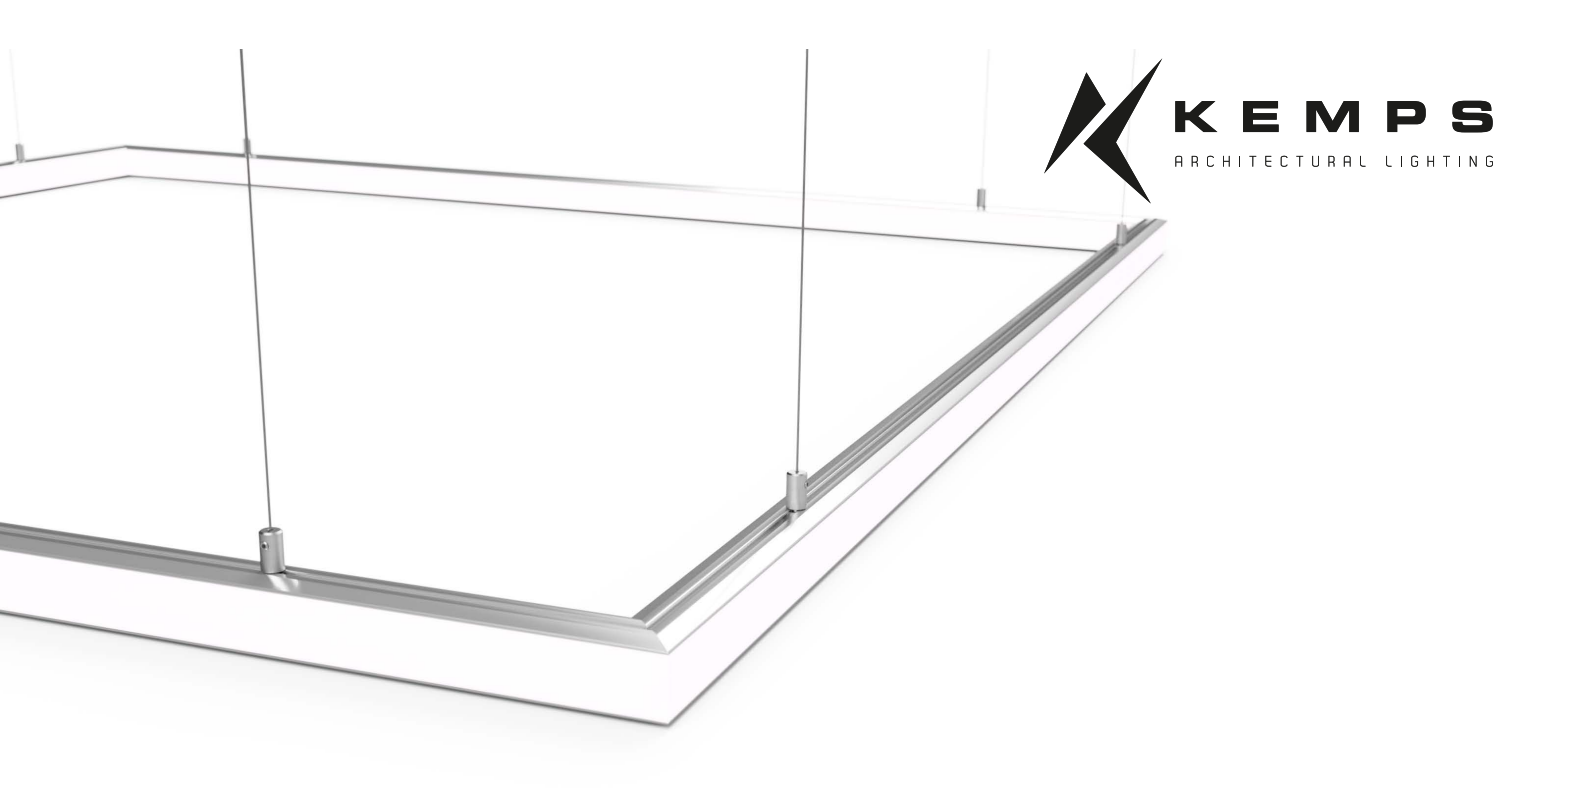

Proteus G1

Suspended Duo Linear LED



Applications

- Decorative

Benefits

- Various colour temperatures available
- Homogeneous appearance
- Maintainable
- Remote gear
- Internal applications
- Multiple lengths available to suit
- Dimmable

Features

- Double sided illumination
- Conductive suspension wire, no cables
- 2700K - 3000K - 4000K
- 19.2W & 38.4W per mtr
- IP54
- Switched - 0-10V - DALI - Phase - DMX - Bluetooth Casambi dimming options
- 5yr warranty
- Re-use luminaire

Technical Information

Power (W/m)	19.2	38.4
Lumen Output (lm/m)	1462	2923
Input (V)	24	
CCT	2700K • 3000K • 4000K	
CRI	>80 • >90	
LED Chip	Epistar (160 leds per m)	
Binning	3 Step MacAdam Elipse	
Control	Switched • 0-10V • DALI • Phase • DMX • Bluetooth Casambi	
Beam angles	2 x 140°	
Lifetime (LM80)	50,000hrs @25°C	
Operating Temp	-25°C to 55°C	
IP Rating	IP54	
Diffuser	Opal	
Finish	Black • Signal White • Anodised Aluminium • Custom	
Mounting	Suspended	

Product Code

PRO - G1- 1 - 2 - 3 - 4 - 5 - 6

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes


PRO-G1-19.2-827-O-54-6060-9005

PRO-G1-19.2-927-O-54-1212-9003


1 Power		2 CCT				3 Diffuser	
19.2W	19.2	>80CRI - 2700K	827	>90CRI - 2700K	927	Opal	0
38.4W	38.4	>80CRI - 3000K	830	>90CRI - 3000K	930		
		>80CRI - 4000K	840	>90CRI - 4000K	940		
4 IP Rating		5 Shape		6 Finish			
IP54	54	300mm x 300mm	3030	Jet Black	9005		
		600mm x 600mm	6060	Signal White	9003		
		1000mm x 1000mm	1010	Grey	9006		
		1200mm x 1200mm	1212	Custom	RAL#		

Specification Drawings

SECTION DETAIL

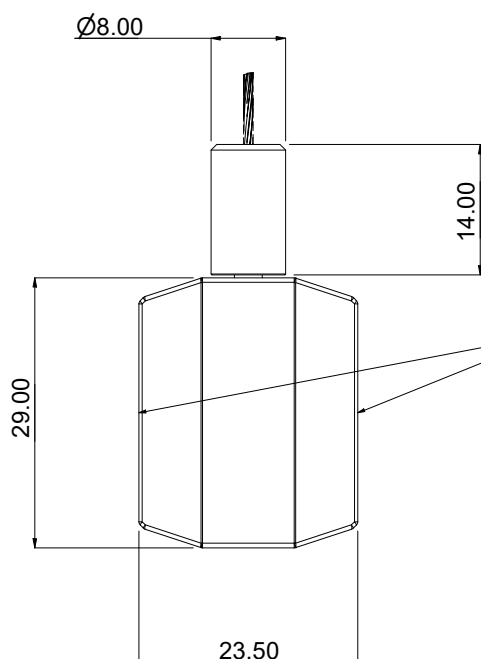

ELEVATION

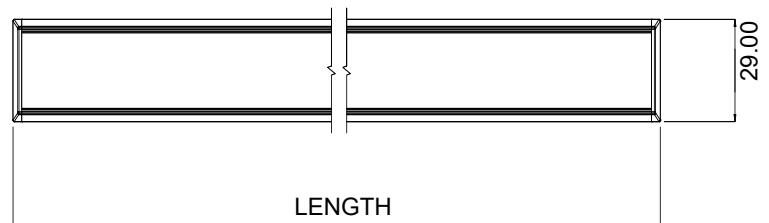

ILLUMINATED SURFACES

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com