



Proteus G2

Circular Suspended Duo LED



Applications

- Decorative

Benefits

- Various colour temperatures available
- Homogeneous appearance
- Maintainable
- Remote gear
- Internal applications
- Multiple lengths available to suit
- Dimmable

Features

- Double sided illumination.
- Conductive suspension wire, no cables
- 2700K - 3000K - 4000K
- 19.2W & 38.4W per mtr
- IP54
- Switched - 0-10V - DALI - Phase - DMX - Bluetooth Casambi dimming options
- 5yr warranty
- Re-use luminaire

Technical Information

Power (W/m)	19.2	38.4
Lumen Output (lm/m)	1462	2923
Input (V)	24	
CCT	2700K • 3000K • 4000K	
CRI	>80 • >90	
LED Chip	Epistar (160 leds per m)	
Binning	3 Step MacAdam Elipse	
Control	Switched • 0-10V • DALI • Phase • DMX • Bluetooth Casambi	
Beam angles	2 x 140°	
Lifetime (LM80)	50,000hrs @25°C	
Operating Temp	-25°C to 55°C	
IP Rating	IP54	
Diffuser	Opal	
Finish	Black • Signal White • Anodised Aluminium • Custom	
Mounting	Suspended	

Product Code

PRO - G2 - 1 - 2 - 3 - 4 - 5 - 6

Example Codes

PRO-G2-19.2-827-O-54-600D-9005

PRO-G2-19.2-927-O-54-1200D-9003

Create your product code by choosing your specification from the product areas.


Final example codes are shown to the right.

1 Power	2 CCT	3 Diffuser
19.2W	19.2	>80CRI - 2700K
38.4W	38.4	>80CRI - 3000K
		>80CRI - 4000K
		>90CRI - 2700K
		>90CRI - 3000K
		>90CRI - 4000K
		Opal
		0


4 IP Rating	5 Shape	6 Finish
IP54	54	600mm diameter
		1000mm diameter
		1200mm diameter
		1600mm diameter
		2000mm diameter
		Custom
		600D
		1000D
		1200D
		1600D
		2000D
		CUS
		Jet Black
		Signal White
		Grey
		Custom
		9005
		9003
		9006
		RAL#

Specification Drawings

SECTION DETAIL

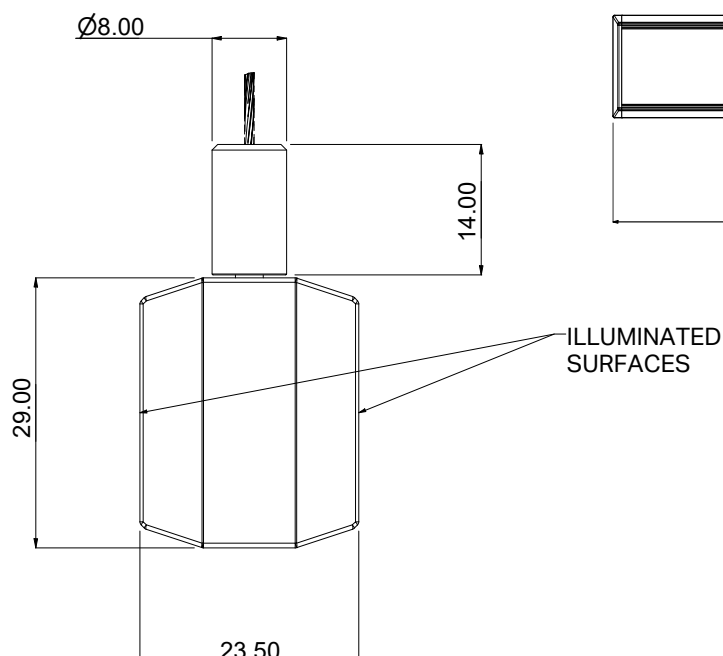

ELEVATION

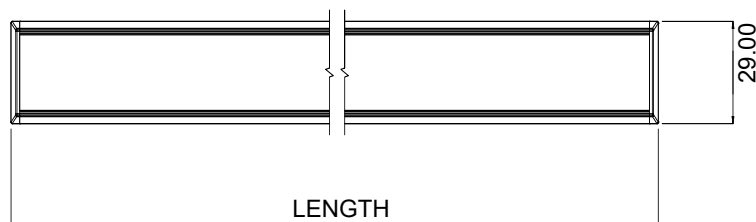

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com