



Athena

Track mounted LED Spotlight



5-Year
Warranty



IP20
Rating



Re-use
Luminaire



LM70
50,000hrs



ROHS
Compliant



CE
Certified



UK
CA
UK Conformity
Assessed


Applications

- Retail
- Museums
- Gallery
- Healthcare
- Offices


Features

- High output and efficiency LED
- Various lumen options
- Philips 90CRI LED Technology
- DALI or switched control
- Adjustment of 355°Horizontal, -70° to 250°Vertical (320° Total)
- 3 beam & finish options
- Low glare multi-faceted reflectors
- Highly efficient passive heatsink
- Global compatible 3 circuit track adaptor as standard
- 50,000hr life (L70/B10)


Beam Angle



25° Beam Angle



40° Beam Angle



60° Beam Angle

Lumen Data

11 Watts

CCT	Lumens	Efficacy
930	1150	105
940	1250	114

20 Watts

CCT	Lumens	Efficacy
930	1800	95
940	1925	101

27 Watts

CCT	Lumens	Efficacy
930	2425	90
940	2600	96

43 Watts

CCT	Lumens	Efficacy
930	3450	80
940	3725	87

Technical Information

CCT	3000K • 4000K
CRI	90CRI
Watts	11W • 20W • 27W • 43W
Lumens (4000K)	1250 • 1925 • 2600 • 3725
Beam Options	25° • 40° • 60°
Finish	Black • White • Black cw Grey heatsink
MacAdam (SDCM)	3
Weight	1.4kg
Mains Voltage	220-240V
Mains Frequency	50-60Hz
IP Rating	IP20
Min Operating Temp	-25c
Max Operating Temp	35c • 25c (43W)
Warranty	5yrs
Lifetime (L70/B10)	>55000hrs (11W, 20W & 27W) >45000hrs (43W)

Product Code

ATH - 1 - 2 - 3 - 4 - 5

Create your product code by choosing your specification from the product areas.

Final example codes are shown below.

Example Codes

ATH-930-25-11-B-D

ATH-940-60-20-W-S

1 CCT

3000K	930
4000K	940

2 Beam Angle

25°	25
40°	40
60°	60

3 Watts

11W	11
20W	20
27W	27
43W	43

4 Finish

Black	B
White	W
Black/Grey	BG

5 Control

DALI	D
Switched	S


Additional Material

Description

Kemps Code

1000mm Track, 3 circuit, DALI, White	TRAK001
1000mm Track, 3 circuit, DALI, Black	TRAK002
2000mm Track, 3 circuit, DALI, White	TRAK003
2000mm Track, 3 circuit, DALI, Black	TRAK004
End Feed, White	TRAK005
End Feed, Black	TRAK006
L Connector, White	TRAK007
L Connector, Black	TRAK008
Straight connector, White	TRAK009
Straight connector, Black	TRAK010
Adjustable corner, White	TRAK011
Adjustable corner, Black	TRAK012
End cap, White	TRAK013
End cap, Black	TRAK014
Fixing point for surface mounted spots, White	TRAK015
Fixing point for surface mounted spots, Black	TRAK016
Track cutting tool	TRAK017
Fast clamp with clutch, 2mtr suspension, White (3per 2mtr, 2 per 1mtr)	TRAK018
Fast clamp with clutch, 2mtr suspension, Black (3per 2mtr, 2 per 1mtr)	TRAK019

Dimension Details

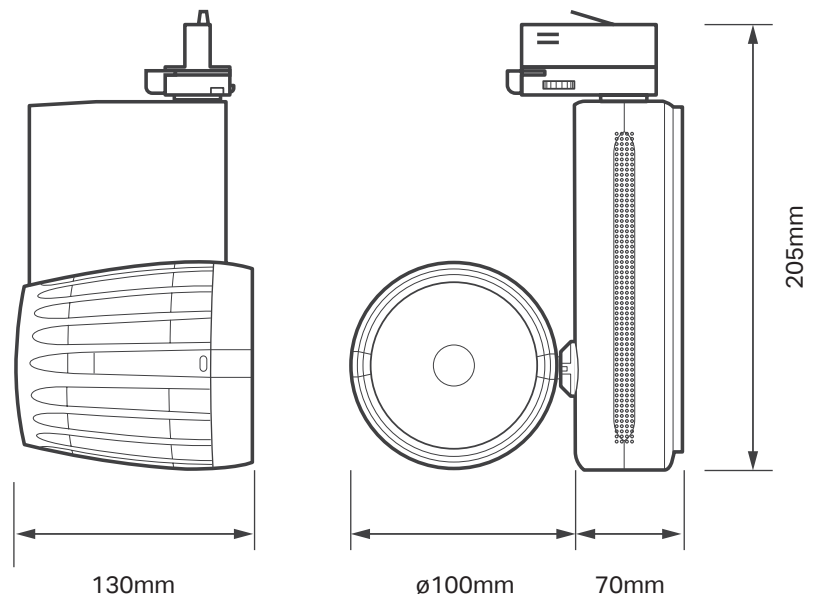

ATH - 1222

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com