

Azuna

Remote Phosphor Linear LED



Applications

- Cove Lighting
- Furniture
- Decorative

Benefits

- 2730 lumens per meter
- No binning issues
- 2400K - 2700K - 3000K - 4000K
- CRI options to suit
- Pixel free light source
- Curved or straight features
- Dimmable
- Easy to install and maintain

Features

- Colour consistent over time
- Various CCT options
- 80CRI or 90CRI
- Homogenous appearance
- 16 lengths available
- LM80 - 50,000hrs

Technical Information

Power (W/m)	26
Luminous Flux (lm/m) (4000K)	2730
Current (mA)	600
Control	Switched • 0-10V • DALI • DMX • Phase • Casambi
Efficacy	105 110 115
CCT	2400K • 2700K • 3000K • 4000K
CRI	80 • 90
Beam Angle	260°
Binning	3 SDCM
IP Rating	IP54
Ambient Operating Temp	-20°C to 50°C
Lifetime (LM80)	50,000hrs
Available Lengths	82mm - 1187mm

Product Code

AZ-1-2-3-4-5-6-7

Example Codes

Create your product code by choosing your specification from the product areas.


Final example codes are shown to the right.

AZ-H-24-80-54-F-1F-1187

AZ-H-30-90-54-F-1F-377

1 Power		3 CRI		5 Brackets		7 Length			
26W	H	80	80	Fixed	F	1187mm	1187	598mm	598
		90	90	Adjustable	A	1114mm	1114	524mm	524
						1041mm	1041	451mm	451
						967mm	967	377mm	377
						893mm	893	303mm	303
						819mm	819	229mm	229
						746mm	746	156mm	156
						672mm	672	82mm	82
2 CCT		4 IP Rating		6 Cable Exit					
2400K	24	IP54	54	1 End	1F				
2700K	27								
3000K	30								
4000K	40								

Specification Drawings

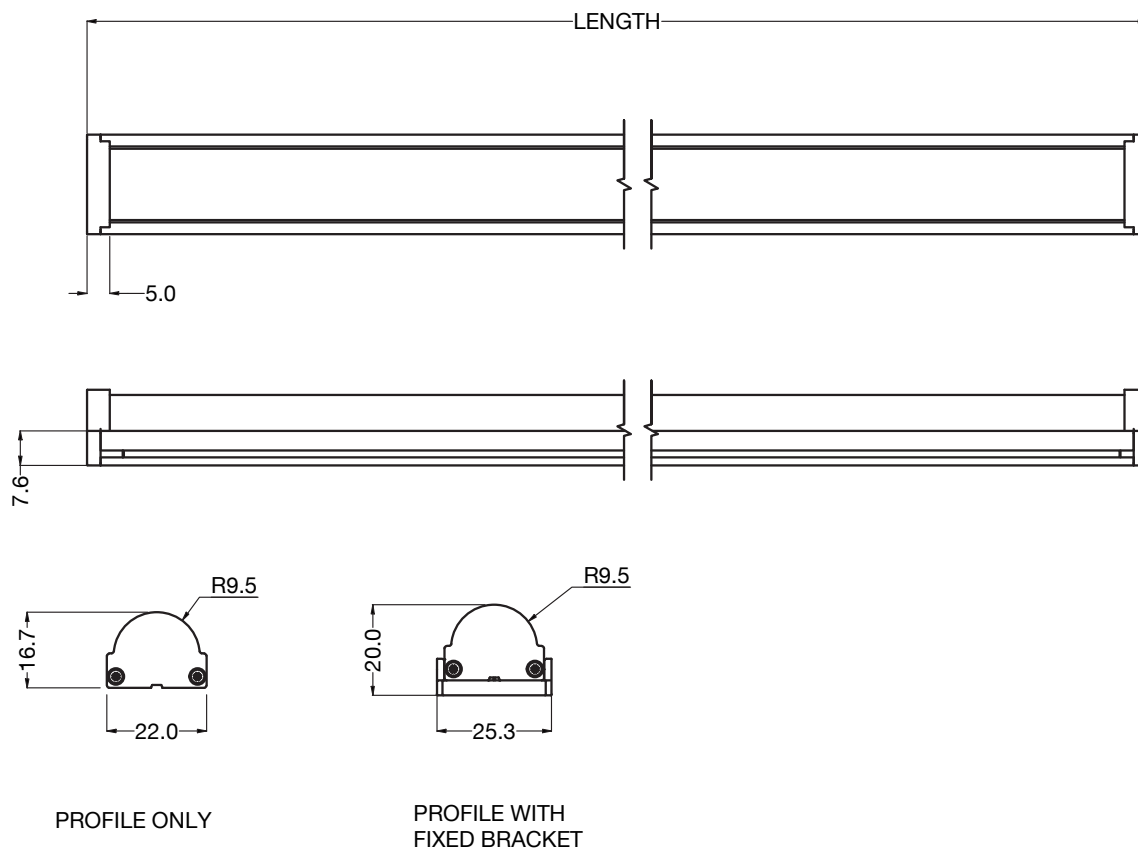

AZ-0722

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com