

## **Proteus SXL - RGBW**

**RGBW Colour Changing Linear LED** 

















# Applications

Furniture

Cove

Display

#### **Benefits**

- Various colours available
- Clear or Opal diffuser options
- Internal applications
- Multiple lengths from 191mm - 2860mm
- Maintainable
- 5yr Warranty
- Re-use luminaire

DALI - DMX - Bluetooth

120° Beam angle

IP54 - IP67

- \_\_\_\_\_
- Corner mounted fixture
- RGBW

**Features** 

- 19.2W per mtr
- 80 CRI
- 167mm cut increments


#### **Technical Information**

Darrier (M/m)	10.2 (all 4 aplaura @1000()
Power (W/m)	19.2 (all 4 colours @100%)
Lumen Output (Im/m)	Red 78 • Green 226 •
	Blue 48 • White 882
Input	24V
Colour	RGBW
CRI	80
LED Chip	Luxeon
Binning	3 Step MacAdam Elipse
Control	DALI • DMX • Bluetooth
Beam angle	120°
Lifetime (LM80)	50,000hrs @25°C
Operating Temp	-25°C to 55°C
IP Rating	IP54 • IP67
Diffuser	Opal • Clear
Mounting	Fixed
Multiple lengths available	191mm - 2860mm

#### **Product Code**

PRO-SXL-RGBW-1-2-3-4-5	1 Power		3 IP Rating	
Create your product code by choosing your specification from the product areas.	19.2W	19.2	IP54 IP67	54 67
Final example codes are shown below.  Example Codes  Diffuser		4 Mounting		
PRO-SXL-RGBW-19.2-C-54-F-XXXX PRO-SXL-RGBW-19.2-O-54-A-XXXX	Clear 120° Opal	С О	Fixed  5 Length	F

### **Specification Drawings**

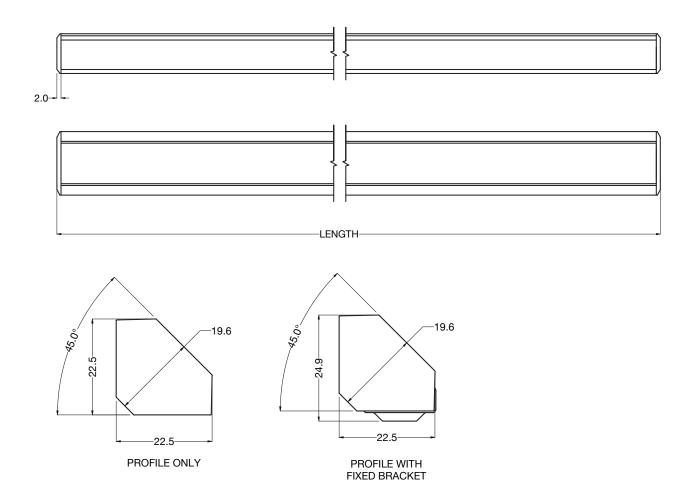

Fittings are provided with end cable entry as standard. Extension cable with female socket connector can be purchased separately with the below product code(s).

5 core M12 Female extension lead 10000mm - CA043

PRO-SXL-RGBW-0822

XXXXmm

XXXX

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.

