

Regis 5



Applications

- Furniture
- Display

Features

- 2700K - 3000K - 4000K
- 17W - 11W - 7W
- 80 & 90 CRI
- Clear or Opal diffusers
- IP54
- 50mm cut increments
- Switched - 0-10V - DALI - Phase - DMX - Bluetooth
- Re-use luminaire
- 5yr Warranty

Benefits

- Multiple lengths from 572mm - 2022mm
- Dimmable
- Various colour temperatures available
- Various lumen outputs
- Internal or external applications
- Remote drivers
- Maintainable

Technical Information

	Low	Medium	High
Power (W/m)	7	11	17
Lumen Output (lm/m) Based on 4000K			
Clear Diffuser	800	1460	2282
Efficacy (lm/W)	114	133	134
Opal Diffuser	480	876	1369
Efficacy (lm/W)	69	80	81
Input	24V		
CCT	2700K • 3000K • 4000K		
CRI	>80 • >90		
LED Chip	Luxeon		
Binning	3 Step MacAdam Ellipse		
Control	Switched • 0-10V • DALI • Phase • DMX • Bluetooth		
Beam angle	120° - 30°		
Lifetime (LM80)	50,000hrs @25°C		
Operating Temp	-25°C to 55°C		
IP Rating	IP54		
Diffuser	Opal • Clear • 30°		
Finish	White • Silver • Black • Custom RAL		
Mounting	Wall mounted		
Multiple lengths available	572mm - 2022mm		

Product Code

REG5-1-2-3-4-5-6

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes

REG5-H-927-C-B-1772-263
REG5-M-827-C1-W-2022-263

1 Power

17W
11W
7W

3 Diffuser

H Clear 120°
M Clear 30°
L Opal

5 Length

C	572mm	572	1322mm	1322
C1	622mm	622	1372mm	1372
O	672mm	672	1422mm	1422
	722mm	722	1472mm	1472
	772mm	772	1522mm	1522
	822mm	822	1572mm	1572
B	872mm	872	1622mm	1622
W	922mm	922	1672mm	1672
S	972mm	972	1722mm	1722
RAL#	1022mm	1022	1772mm	1772
	1322mm	1322	1822mm	1822
	1372mm	1372	1872mm	1872
	1422mm	1422	1922mm	1922
	1472mm	1472	1972mm	1972
	1522mm	1522	2022mm	2022

2 CCT

>80CRI - 2700K
>90CRI - 2700K
>80CRI - 3000K
>90CRI - 3000K
>80CRI - 4000K
>90CRI - 4000K

827
927
830
930
840
940

4 Finish


Black
White
Silver
Custom RAL

B
W
S
RAL#

6 Height

263mm	263	Custom	C
-------	-----	--------	---

Technical Drawings

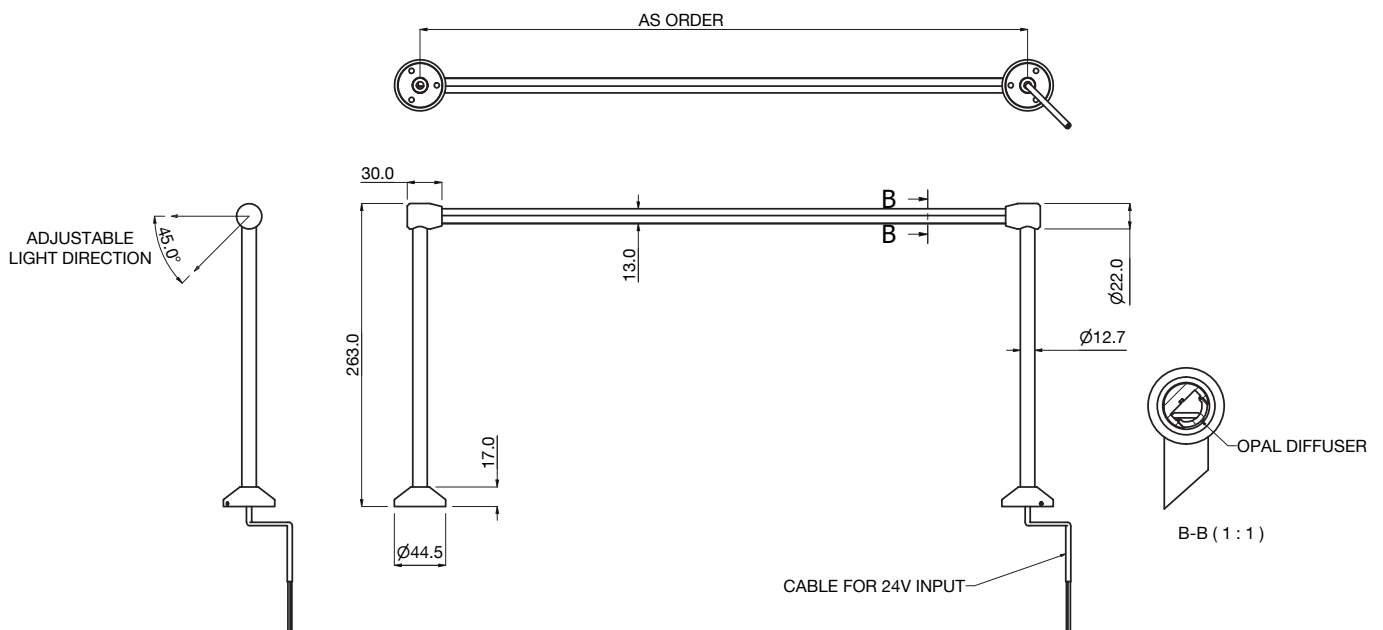

REG5-0522

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempslighting.com