

Flexus 360 Silicone

Decorative Flexible LED



Applications

- Decorative

Features

- Bendable in all directions
- High quality LED with homogenous appearance
- 100mm min bend radius
- Interior or exterior
- IP65
- Power from one end
- Environmentally friendly
- Energy efficient
- UV resistant
- Silicone material

Technical Information

Lumen Output (lm/m)	1152 (4000K)
Power (W/m)	12
Material	Silicone
Bending	All directions
CCT	2700K • 3000K • 4000K • 6500K
CRI	>90
Control	Switched • 0-10V • DALI • DMX • Phase • Bluetooth
Beam Angle	360°
Binning	3 Step MacAdam
Input Voltage (V)	24
Max length	5m
Diameter	18mm
IP Rating	IP65
Operating Ambient Temp	-40°C to 45°C
Lifetime	>50K hrs Internal • >36K External
Connection	Injection molded 5mtr tail to bare end

Product Code

FX360 - 1 - 2 - 3 - 4 - 5

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes

FX360-927-12-S-65-XXXX
FX360-965-12-P-65-XXXX

1 CCT

2700K 90CRI	927
3000K 90CRI	930
4000K 90CRI	940
6500K 90CRI	965

2 Power

12W	12
-----	----

4 IP Rating

IP65	65
------	----



3 Mounting

Surface	S
Suspended	P

5 Length

XXXXmm	XXXX
--------	------

Specification Drawings

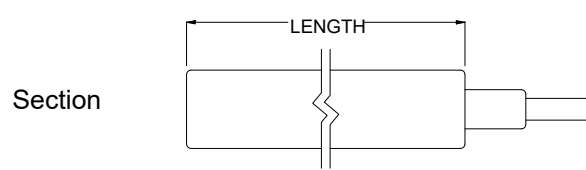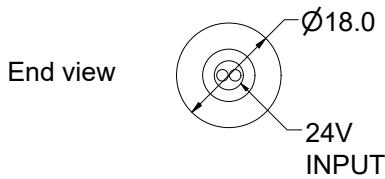

Fixing Accessories

Description


Flexus 360 Mounting Surface Clips (2 per pack)
Flexus 360 Mounting Ceiling Clips (2 per pack)
Flexus 360 Suspension kit - max length of 1200mm

Kemps Code

FX360-005
FX360-006
FX360-007

Assembly Caution

Min Bend Dia is 100mm

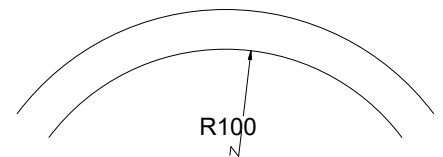

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com