




Lunara



Applications

- Decorative
- Ambient Lighting

Benefits

- Various configurations to suit
- Various colour temperatures
- Homogenous appearance
- Dimmable
- Remote gear

Features

- 1, 2, 3, 4 or 5 globe options
- 2700K - 3000K - 4000K
- 80 & 90 CRI
- Switched - 0-10V - DALI - Phase - DMX - Bluetooth Casambi
- IP54
- 5yr Warranty

Technical Information

Power (W/m)	14.3W per globe
Lumen Output Per globe based on 3000K 80CRI	1290
Efficacy	90
CCT	2700K • 3000K • 4000K
CRI	>80 • >90
Binning	3 Step MacAdam Elipse
Control	Switched • 0-10V • DALI • Phase • DMX • Bluetooth
Lifetime (LM80)	50,000hrs @25°C
Operating Temp	-25°C to 55°C
IP Rating	IP54
Diffuser	Opal
Finish	Black - Signal White - Grey - Custom RAL
Mounting	Surface (suspended available if required - subject to design)

Product Code

LUN - 1 - 2 - 3

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes

LUN-28.6-827-9005

LUN-71.5-830-9003

1 Power

1 Globe	14.3
2 Globes	28.6
3 Globes	42.9
4 Globes	57.2
5 Globes	71.5


2 CCT

80 CRI - 2700K	827
80 CRI - 3000K	830
80 CRI - 4000K	840
90 CRI - 2700K	927
90 CRI - 3000K	840
90 CRI - 4000K	927

3 Finish

Jet Black	9005
Signal White	9003
Grey	9006
Custom RAL	RAL#

Specification Drawings

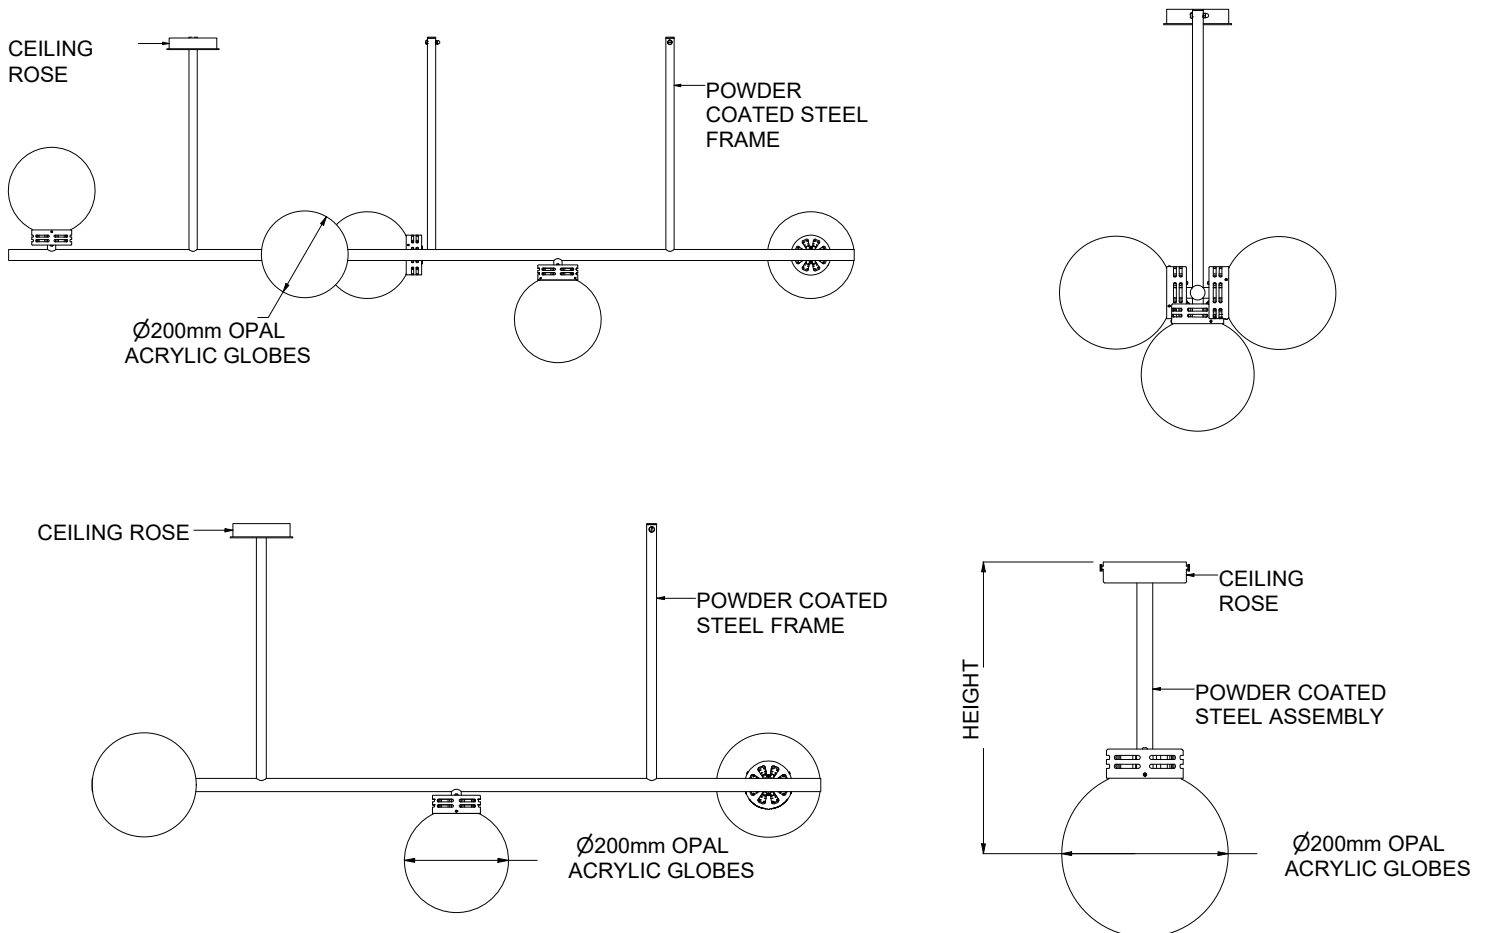

Lunara can be designed to suit your requirements. Please speak to our sales team for further support.

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempslighting.com