



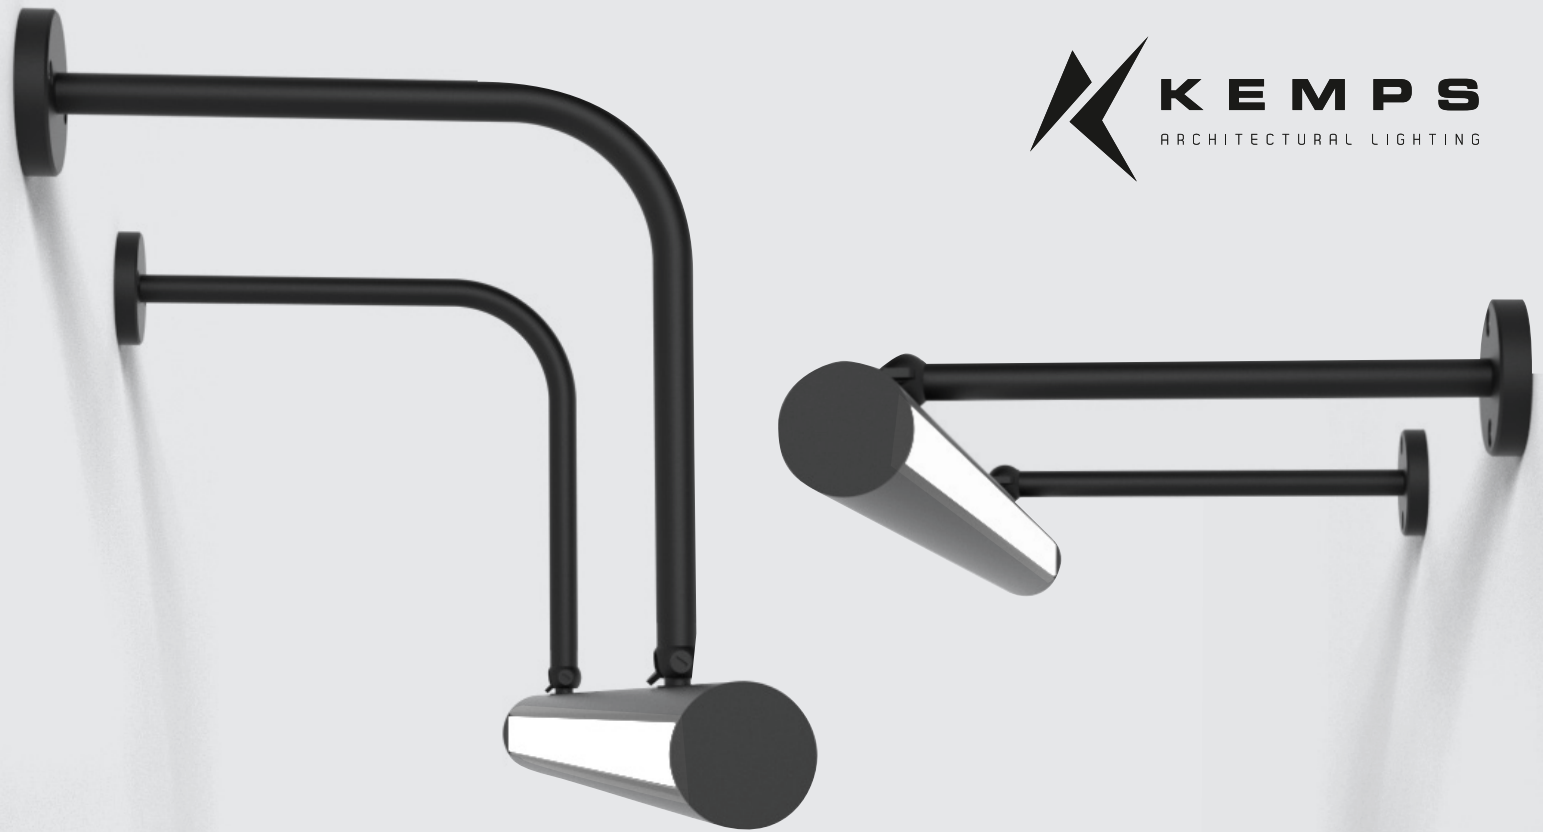

Regis 1



Applications

- General Lighting
- Display
- Furniture

Features

- 2200K - 5700K
- 19W - 15W - 9W - 5W
- 80 & 90CRI
- Clear or Opal diffusers
- IP54 - IP65
- 50mm cut increments
- Switched - 0-10V - DALI - Phase - DMX - Bluetooth
- Re-use luminaire
- 5yr Warranty

Benefits

- Multiple lengths from 520mm - 3020mm
- Dimmable
- Various colour temperatures available
- Various lumen outputs
- Internal or external applications
- Remote drivers
- Maintainable

Technical Information

Power (W/m)	5	9	15	19
Lumen Output (lm/m) Based on 4000K Clear	715	1320	2100	2625
Efficacy (lm/W) Based on 4000K Clear	143	147	140	138
Lumen Output (lm/m) Based on 4000K Opal	454	838	1334	1666
Efficacy (lm/W) Based on 4000K Opal	91	93	89	88
Input (V)	24			
CCT	2200K • 2400K • 2700K • 3000K • 4000K			
CRI	>80 • >90			
LED Chip	Luxeon			
Binning	3 Step MacAdam Elipse			
Control	Switched • 0-10V • DALI • Phase • DMX • Bluetooth			
Beam angles	120° • 30° • 12°			
Lifetime (LM80) B10	60,000hrs @25°C			
Operating Temp	-25°C to 55°C			
IP Rating	IP54 • IP65			
Diffuser	Opal • Clear			
Finish	Silver • Black • White • Bronze Custom RAL			
Mounting	Fixed or Adjustable			
Lengths	520mm - 3020mm			

Product Code

REG1-1-2-3-4-5-6-7

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes

REG1-15-822-C-54-B-90-3020

REG1-9-840-O-65-W-S-2320

1 Power

19W	19
15W	15
9W	9
5W	5

3 Diffuser

Opal	O
Clear 120°	C
Clear 30°	C1
Clear 12°	C2

7 Length

520mm	520
1120mm	1120
1220mm	1220
1320mm	1320
1420mm	1420
1520mm	1520
1620mm	1620
1720mm	1720
1820mm	1820
1920mm	1920
2020mm	2020
2120mm	2120
2220mm	2220
2320mm	2320
2420mm	2420
2520mm	2520
2620mm	2620
2720mm	2720
2820mm	2820
2920mm	2920
3020mm	3020

2 CCT

>80CRI - 2200K*	822
>80CRI - 2400K*	824
>80CRI - 2700K	827
>80CRI - 3000K	830
>80CRI - 3500K	835
>80CRI - 4000K	840
>80CRI - 5000K	850
>80CRI - 5700K	857
>90CRI - 2400K*	924
>90CRI - 2700K	927
>90CRI - 3000K	930
>90CRI - 3500K	935
>90CRI - 4000K	940
>90CRI - 5000K	950
>90CRI - 5700K	957

4 IP Rating

IP54	54
IP65**	65

5 Finish

Black	B
White	W
Silver	S
Bronze	BR
Custom RAL	RAL#


6 Mounting

Straight	S
90°	90

*2200K & 2400K not available in IP65

** Tolerances in CCT with IP65 products can occur due to manufacturing process

Technical Drawings

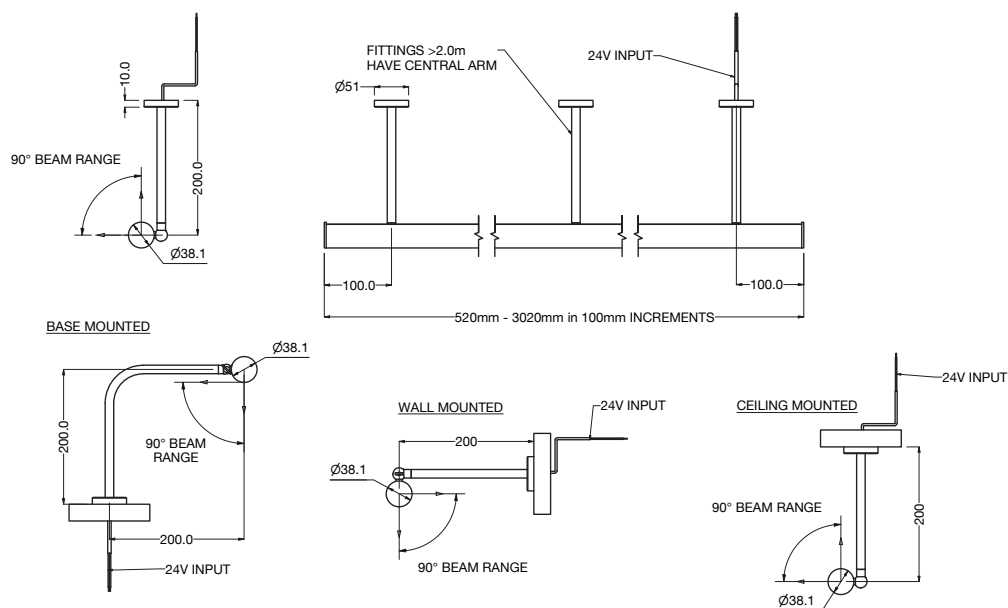

REG1-0722

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com