

# Figaro 60 A S

## Surface Mount IP54



5-Year  
Warranty



IP54  
Rating



Re-use  
Luminaire



LM80  
50,000hrs



ROHS  
Compliant



CE  
Certified



UK  
CA  
UK Conformity  
Assessed

### Features

- LED surface mounted luminaire, direct light distribution.
- Classic design, lightweight 67mm wide aluminium body with silicone, opal or microprismatic diffuser options.
- Choice of silver, black and white body colours as standard with many custom RAL colours available.
- Latest Cree LED technology with CRI-80 or CRI-90, 3000K or 4000K as standard.
- CCT 2200K, 2700K, 3500K, 5000K available on request (subject to quantity)
- Internal reflector constructed from the latest MCPET 99.6% reflective material, resulting in dot and shadow free homogenous light appearance.
- IP54
- Integrated emergency and sensor technology available.
- Max length 2912mm

### Applications

- Retail
- Hospitality
- Residential
- Commercial
- Public Realm

### Product Options

<b>Control</b>	Switched • DALI 2 • (0)1-10V • Bluetooth (Casambi)
<b>CCT</b>	2200K* • 2700K* • 3000K** • 3500K* • 4000K** • 5000K*
<b>CRI</b>	>90CRI • >80CRI
<b>Body Colour</b>	Black • White • Silver Custom RAL on request.
<b>Diffuser Type</b>	Opal
<b>Emergency*</b>	Available on Lengths above 1464

\*On Request \*\* Standard

### Technical Information

LENGTH	Economy			Medium			High		
	WATTAGE	LUMEN OUTPUT	LLM/CW	WATTAGE	LUMEN OUTPUT	LLM/CW	WATTAGE	LUMEN OUTPUT	LLM/CW
899	15	1581	108	20	2238	110	30	3147	103
1189	19	2099	108	27	2972	110	40	4179	103
1479	24	2618	108	34	3706	110	50	5211	103
1770	29	3138	108	40	4443	110	60	6247	103
2060	34	3657	108	47	5177	110	70	7279	103
2350	39	4176	108	54	5911	110	80	8311	103
2640	44	4694	108	60	6645	110	90	9343	103
2930	48	5213	108	67	7379	110	100	10376	103

## Product Code

### FIG60-A-S-1-2-3-4-5-6-7

Example Codes

Create your product code by choosing your specification from the product areas.

FIG60-A-S-H-840-0-O-9006-02042-54

FIG60-A-S-M-930-B-O-9003-01461-54

Final example codes are shown to the right.

1 Drive Current		2 CCT		3 Control		4 Diffuser	
High (1050mA)	H	80 CRI - 3000K	830	Switched	S	Matt Opal	O
Medium (700mA)	M	80 CRI - 4000K	840	DALI	D		
Economy (500mA)	E	90 CRI - 3000K	930	0-10V	0		
		90 CRI - 4000K	940	Bluetooth	B		

5 Finish		6 Length		7 IP Protection			
Jet Black	9005	881mm	00881	2042mm	02042	IP54	54
Signal White	9003	1171mm	01171	2332mm	02332		
Grey	9006	1461mm	01461	2622mm	02622		
Custom RAL**	RAL#	1751mm	01751	2912mm	02912		

\*Custom lengths, infills, continuous lines and corners available. \*\* Custom RAL colours subject to availability and order size

\*\*\*Please enquire with your requirements.

## Technical Drawings

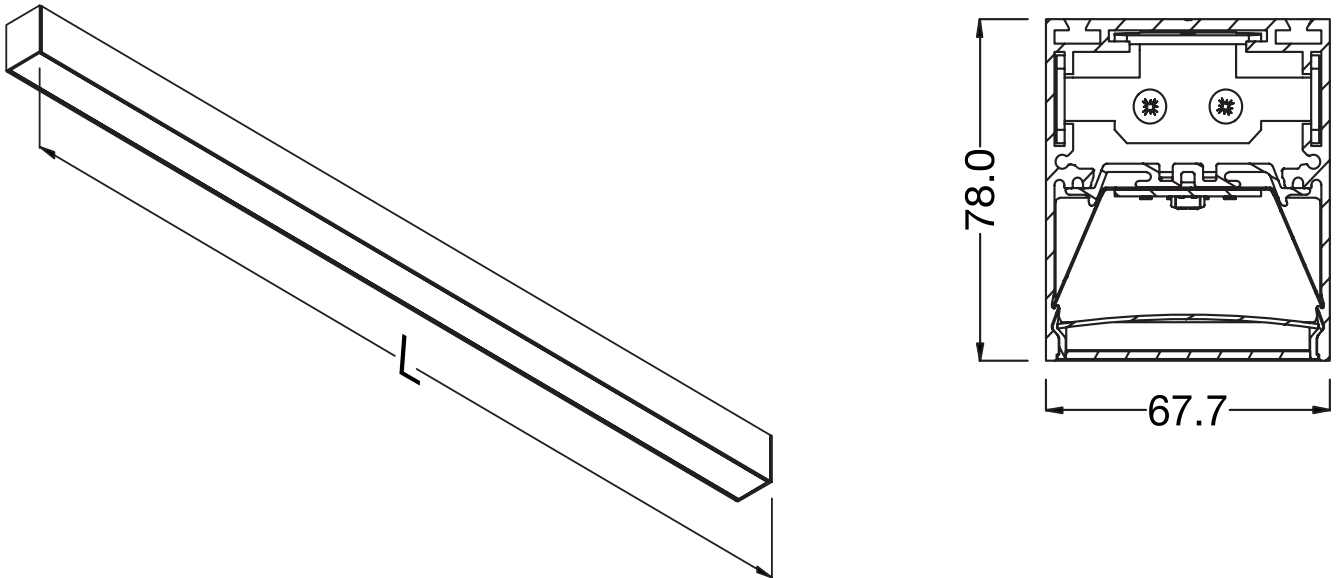


FIG60-A-S-1122

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempsonlighting.com

kempsonarchitecturallighting.com