



KEMPS
ARCHITECTURAL LIGHTING



Flexus 4 - 3D T

Single Colour Flexible LED



5-Year
Warranty



IP65-7
Rating



UV
Resistant



Flame
Resistant



Solvent
Resistant



Saltwater
Resistant



RoHS
Compliant



CE
Certified



UK
Conformity
Assessed

Applications

- Counters
- Decorative
- Furniture
- Facades
- Landscapes
- Signage

Features

- Factory made IP67 lengths or IP65 DIY kit available
- High quality homogenous light
- 90CRI
- Vertical & Horizontal bend
- 120mm min bend diameter
- Interior or exterior
- IP67 - IP65
- 5yr Warranty Internal - 3yr External
- Solvent, Flame and salt resistant
- Silicone material

Technical Information

Lumen Output (lm/m) 4000K	340
Power (W/m)	8W
Material	Silicone
Bending	Vertical & Horizontal
CCT	2700K • 3000K • 4000K
CRI	90
Control	Switched • 0-10V • DALI • DMX • Phase • Bluetooth
Beam Angle	110°
LED	Epistar
Binning	3 Step MacAdam
Input Voltage (V)	24
Max length (1 entry)	5m
Cutting	29.41mm
IP Rating	IP67 - IP65
Operating Ambient Temp	-20°C to 55°C
Lifetime	>50,000hrs - LM80
Connection	1mtr tail to bare end
IK Rating	IK08

Product Code

FX4-S-3D-T- **1** - **2** - **3** - **4**

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.

Example Codes

FX4-S-3D-T-927-1E-67-XXXX

FX4-S-3D-T-930-1R-65-XXXX

1 CCT

2700K 90CRI	927
3000K 90CRI	930
4000K 90CRI	940

2 Cable Entry

1 End Feed	1E
1 Side Feed	1S
1 Rear Feed	1R

3 IP Rating

IP67	67
IP65	65

4 Length

XXXXmm **XXXX**



IP67 for injection moulded factory made to order length

IP65 for precise cutting/glueing on site - please state on specification/ordering

Cable Entry Options

Assembly Caution

Min Bend Dia is **120mm**

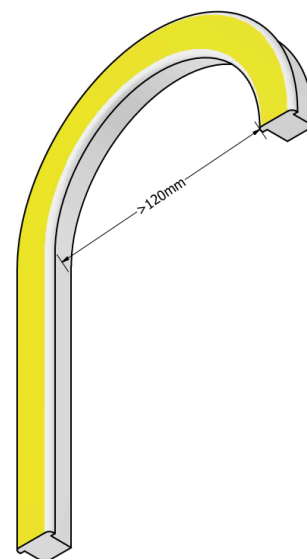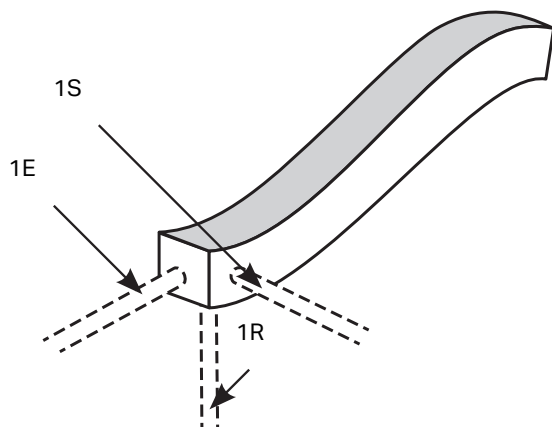

FX4-S-0622

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempslighting.com

Flexus 4 - 3D T



Fixing Accessories


Description

Kemps Code


Flexus 4, 3D, Bendable serrated Aluminium profile, 1000mm
Flexus 4, 3D, Straight Aluminium profile, 1000mm
Flexus 4, 3D, Aluminium clip, 20mm
Flexus 4, 3D, End cable entry with additional end cap, IP65
Flexus 4, 3D, Side or rear cable entry cap with additional end cap, IP65

FX4-3D-BSAP-1000
FX4-3D-SAP-1000
FX4-3D-AC-20
FX4-3D-E-C-IP65
FX4-3D-SR-C-IP65


Specification Drawings



Flexus 4 3D T
Section



Aluminium Serrated
Bendable Profile



Straight Aluminium
Profile / Clip

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com