




Fortis 3

Single Colour High Power Linear LED

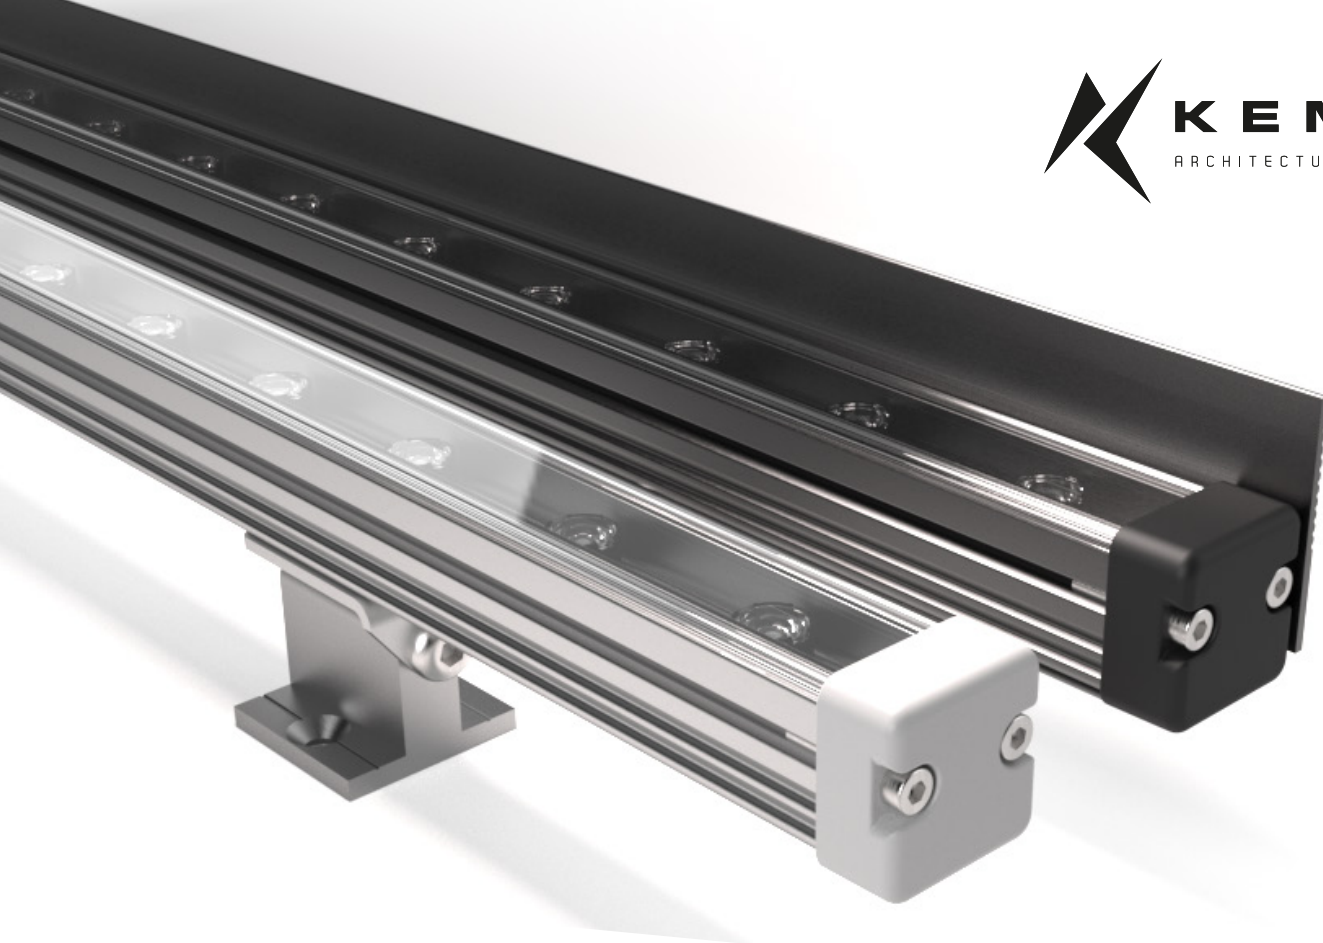

5-Year
Warranty



IP54
Rating



LM80
50,000hrs



ROHS
Compliant



CE
Certified



UK Conformity
Assessed

Applications

- Wall washing

Benefits

- Discreet and sleek design
- Wide range of CCT
- Colour rendering options
- High lumen output
- Low power consumption
- Various beam angles
- 16 lengths available
- Finish options
- 3 mounting positions
- Anti-glare options
- Easy installation
- Unique & compact design
- Internal use
- Remote drivers
- Fully dimmable

Features

- 25mm x 25mm profile dimensions
- 2200K > 5700K
- 80 or 90 CRI
- 3439 Lumens per metre
- 28W per metre
- 168mm - 2271mm lengths available
- Black, Silver anodised, custom
- Fixed or adjustable brackets
- Cowl or louvre options
- Pre-assembled with factory fitted tail and connector
- IP54
- Drivers up to 50m away

Electrical Information


Lumen Output (lm/m) based on 15° 4000K 3439

Power (W/m) 28

Technical Information

CCT	2200K • 2500K • 2700K • 3000K 3500K • 4000K • 5000K • 5700K
CRI	>80 • >90
Control	Switched • 0-10V • DALI • Phase Casambi
Binning	3 Step MacAdam
LEDs Per Metre	30
Beam Angles	15° • 25° • 35° • 45° • 60° • 15°x50°
Lifetime @ LM80	50,000hrs @ 25°C
Operating Temp	-25°C to 55°C
IP Rating	IP66
Diffuser Material	Clear Polycarbonate
Finish	Silver Anodised Aluminium Black Anodised Aluminium Custom Anodised
Mounting	Fixed or Adjustable Brackets

Beam Angles

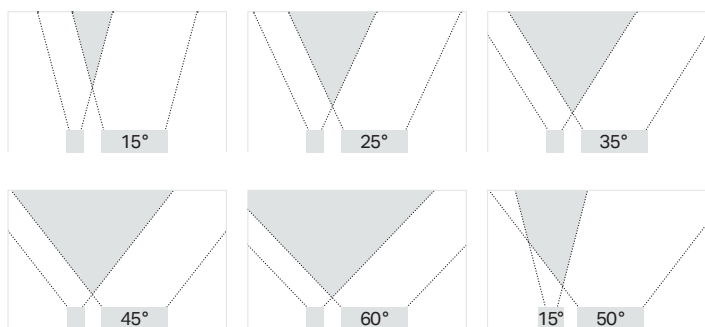

Product Code

FOR3 - 1 - 2 - 3 - 4 - 5 - 6

Create your product code by choosing your specification from the product areas below.

Example Codes

FOR3-827-35-S-C-A1-1875

FOR3-957-1550-C-C-F1-2271

1 CCT / CRI (Colour)

	>70CRI	>80CRI	>90CRI		>80CRI	>90CRI
2200K	722	N/A	N/A	3500K	835	N/A
2500K	N/A	825	N/A	4000K	840	940
2700K	N/A	827	927	5000K	850	N/A
3000K	N/A	830	930	5700K	857	N/A

2 Beam Angle

15°	15	35°	35	60°	60
25°	25	45°	45	15°x50°	1550

3 Finish

Silver Anodised	S
Black Anodised	B
Custom Anodised	C

4 Anti-Glare

None	X
Cowl	C
Louvre (integral mesh)	L
3D Louvre	3DL

5 Brackets


Flat Fixed	F1
Adjustable	A1
Bespoke	B

6 Length




XXXXmm	XXXX
--------	-------------

Specification Drawings


Simple Flat Bracket F1

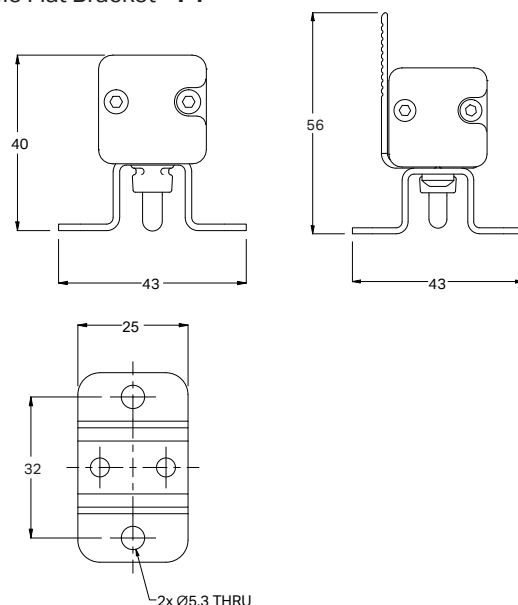

Adjustable Bracket A1

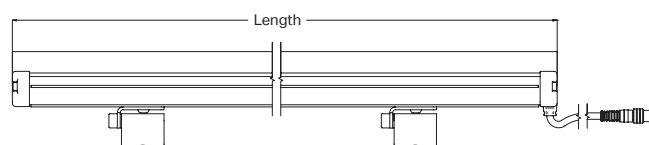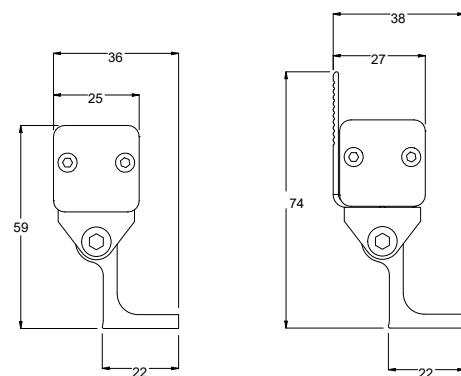

3D Louvre
Designed to
suit each
application



Fortis 3 fittings are provided with a 300mm cable with male plug connector. Extension cables with female socket connector must be purchased separately with the below product codes.

M12, 2 core, PUR, 10000mm female ext lead **CA040**

M12, 2 core, PUR, 50000mm female ext lead **CA216**

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com