



Artemis 2

Track mounted LED Spotlight




Applications

- Retail
- Museums
- Gallery
- Healthcare
- Offices


Features

- Sleek contemporary track spotlight with vertical gear housing
- Swivel, tilt adjustment for total directional control
- High output and efficiency LED
- Various lumen options
- Adjustment of 355°Horizontal, 0-90°Vertical
- Tridonic LED Technology
- DALI or switched control
- 3 beam & 2 finish options
- Low glare multi-faceted reflectors
- Highly efficient passive heatsink
- Global compatible 3 circuit track adaptor as standard
- 50,000hr life (L70/F10)


Beam Angle



17° Beam Angle



24° Beam Angle



36° Beam Angle

Lumen Data

15 Watts

CCT	Lumens	Efficacy
830	1526	102
930	1254	81
840	1582	105
940	1367	91

20 Watts

CCT	Lumens	Efficacy
830	1990	100
930	1634	82
840	2057	103
940	1783	89

25 Watts

CCT	Lumens	Efficacy
830	2428	97
930	1994	80
840	2509	100
940	2175	87

31 Watts

CCT	Lumens	Efficacy
830	2914	94
930	2393	77
840	3011	97
940	2610	84

Technical Information

CCT	3000K - 4000K
CRI	80 & 90CRI
Watts	15W - 20W - 25W - 31W
Lumens (80CRI 4000K)	1582 - 3011
Beam Options	17° - 24° - 36°
Finish	Black - White
MacAdam (SDCM)	3
Weight	1.4kg
Mains Voltage	220-240V
Mains Frequency	50-60Hz
IP Rating	IP20
Min Operating Temp	-20c
Max Operating Temp	35c
Warranty	5yrs
Lifetime (L70/F10)	>55000hrs

Product Code

ART2 - 1 - 2 - 3 - 4 - 5

Create your product code by choosing your specification from the product areas.

Final example codes are shown below.

Example Codes

ART2-930-24-15-B-D

ART2-840-36-20-W-S

1 CCT

3000K - 90CRI	930
3000K - 80CRI	830
4000K - 90CRI	940
4000K - 80CRI	840

2 Beam Angle

17°	17
24°	24
36°	36

3 Watts

15W	15
20W	20
25W	25
31W	31

4 Finish

Black	B
White	W

5 Control


*DALI	D
*Switched	S

*Horizontal gear housing available

Additional Material

Description	Kemps Code
1000mm Track, 3 circuit, DALI, White	TRAK001
1000mm Track, 3 circuit, DALI, Black	TRAK002
2000mm Track, 3 circuit, DALI, White	TRAK003
2000mm Track, 3 circuit, DALI, Black	TRAK004
End Feed, White	TRAK005
End Feed, Black	TRAK006
L Connector, White	TRAK007
L Connector, Black	TRAK008
Straight connector, White	TRAK009
Straight connector, Black	TRAK010
Adjustable corner, White	TRAK011
Adjustable corner, Black	TRAK012
End cap, White	TRAK013
End cap, Black	TRAK014
Track cutting tool	TRAK015
Fast clamp with clutch, 2mtr suspension, White (3per 2mtr, 2 per 1mtr)	TRAK016
Fast clamp with clutch, 2mtr suspension, Black (3per 2mtr, 2 per 1mtr)	TRAK017

Dimension Details

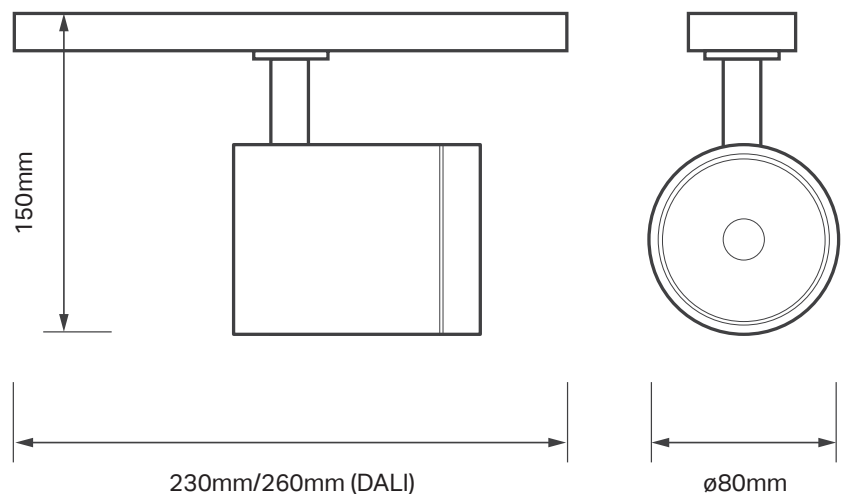

ART2-1222

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com