




Regis 5

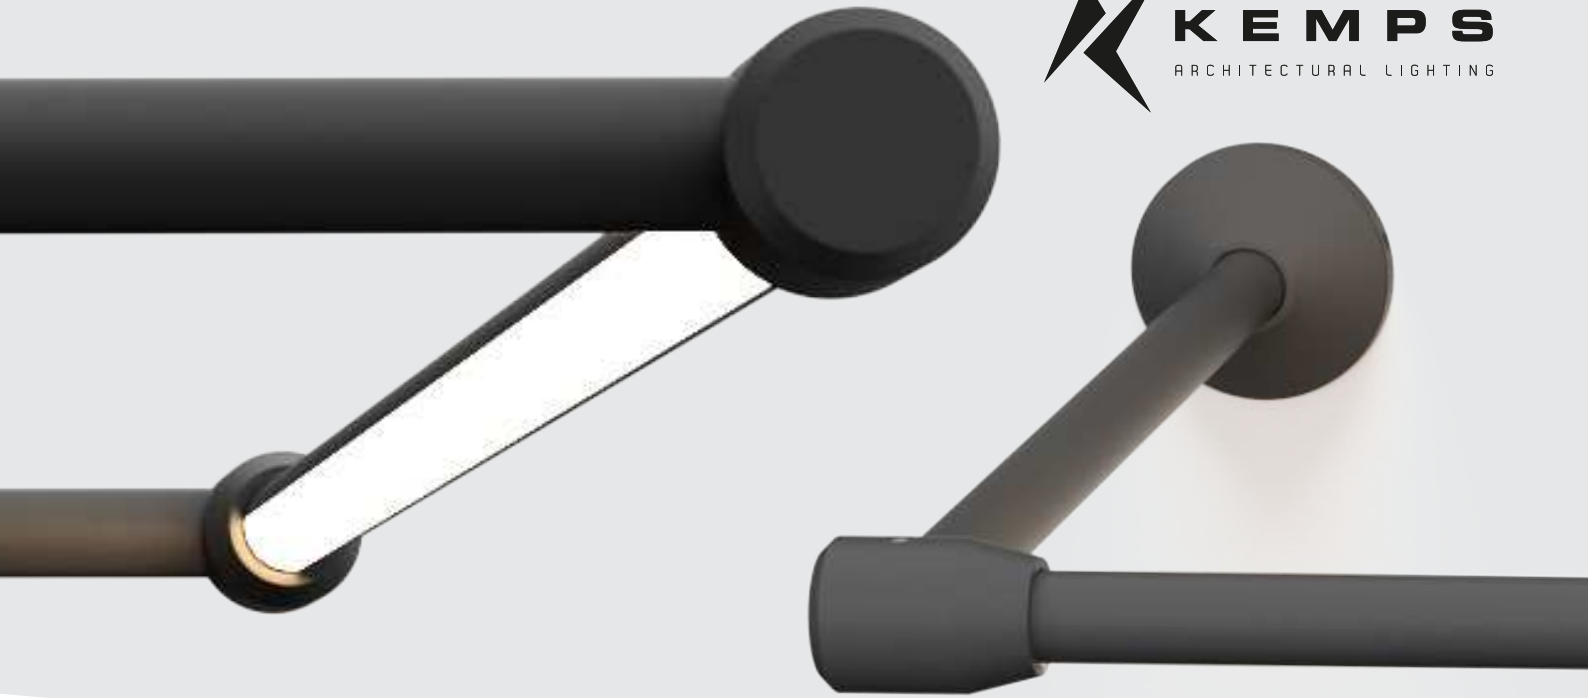

Applications

- Furniture
- Display

Features

- 2700K - 3000K - 4000K
- 15W - 9W - 5W
- 80 & 90 CRI
- Clear or Opal diffusers
- IP54
- 50mm cut increments
- Switched - 0-10V - DALI - Phase - DMX - Bluetooth
- Re-use luminaire
- 5yr Warranty

Benefits

- Multiple lengths from 572mm - 2022mm
- Dimmable
- Various colour temperatures available
- Various lumen outputs
- Internal or external applications
- Remote drivers
- Maintainable

Technical Information

Power (W/m)	5	9	15
Lumen Output (lm/m) Based on 4000K			
Clear Diffuser	715	1320	2100
Efficacy (lm/W)	143	146	140
Opal Diffuser	454	838	1334
Efficacy (lm/W)	90	93	89
Input	24V		
CCT	2700K • 3000K • 4000K		
CRI	>80 • >90		
LED Chip	Luxeon		
Binning	3 Step MacAdam Ellipse		
Control	Switched • 0-10V • DALI • Phase • DMX • Bluetooth		
Beam angle	120° - 30°		
Lifetime (LM80)	50,000hrs @25°C		
Operating Temp	-25°C to 55°C		
IP Rating	IP54		
Diffuser	Opal • Clear • 30°		
Finish	White • Silver • Black • Custom RAL		
Mounting	Wall mounted		
Multiple lengths available	572mm - 2022mm		

Product Code

REG5-1-2-3-4-5-6

Create your product code by choosing your specification from the product areas.

Final example codes are shown to the right.


Example Codes

REG5-15-927-C-B-1772-263

REG5-9-827-C1-W-2022-263

1 Power	3 Diffuser	5 Length
15W	15 Clear 120°	C 572mm 572 1322mm 1322
9W	9 Clear 30°	C1 622mm 622 1372mm 1372
5W	5 Opal	O 672mm 672 1422mm 1422
		722mm 722 1472mm 1472
		772mm 772 1522mm 1522
		822mm 822 1572mm 1572
		872mm 872 1622mm 1622
		922mm 922 1672mm 1672
		972mm 972 1722mm 1722
		1022mm 1022 1772mm 1772
		1322mm 1322 1822mm 1822
		1372mm 1372 1872mm 1872
		1422mm 1422 1922mm 1922
		1472mm 1472 1972mm 1972
		1522mm 1522 2022mm 2022
2 CCT	4 Finish	6 Height
>80CRI - 2700K	827 Black	B 263mm 263 Custom C
>90CRI - 2700K	927 White	W
>80CRI - 3000K	830 Silver	S
>90CRI - 3000K	930 Custom RAL	RAL#
>80CRI - 4000K	840	
>90CRI - 4000K	940	

Technical Drawings

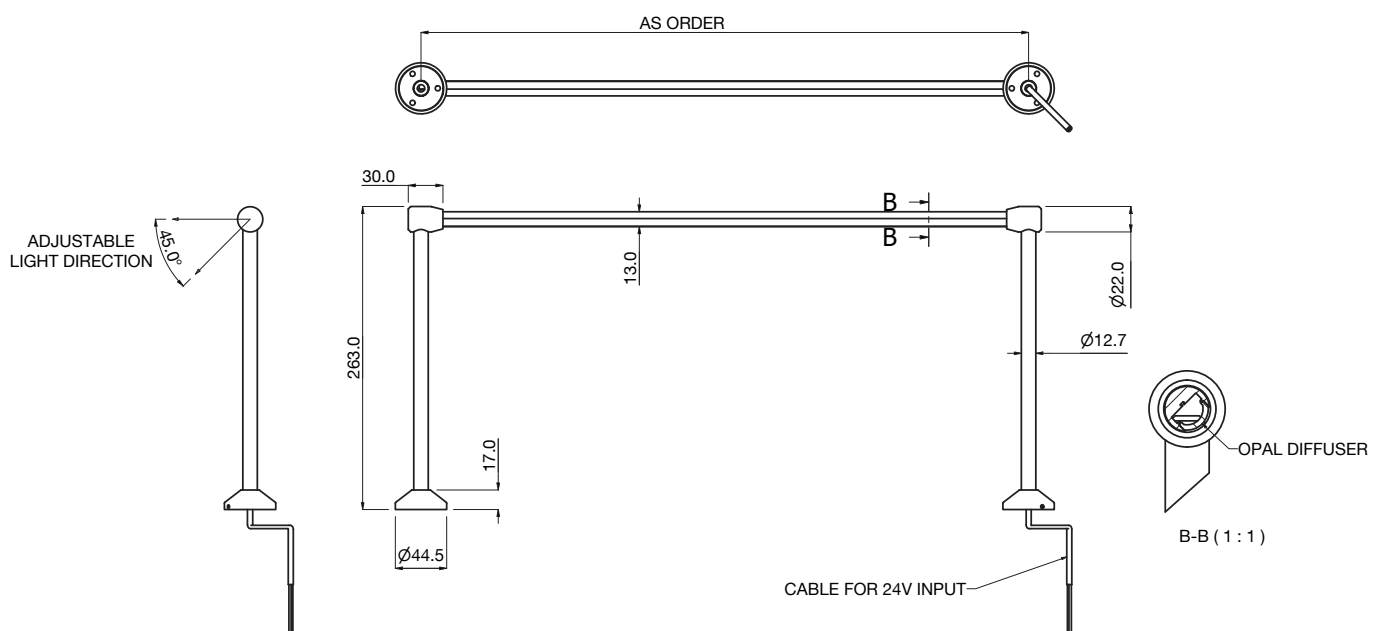

REG5-0522

Complies with EN60598-1 and pertinent regulations

Specifications are subject to change without prior notice. Please refer to our website for most up to date version.



Contact our sales team for further assistance

0113 263 9039

sales@kempslighting.com

kempsarchitecturallighting.com